


START Waterproof Slim 1500 IP65 7200lm 840
0046372

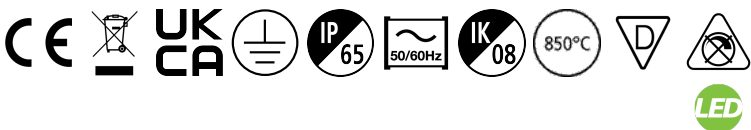

Features

- START Waterproof Slim is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 53W; 7200lm; High efficiency with 136lm/W and 100,000 hours lifespan L70B50. SDCM < 5; IP65; IK08; Class I; 1488mm x 70mm x 69mm.


Product Overview

Product name	START Waterproof Slim 1500 IP65 7200lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357078
Fixture luminous flux (lm)	7200
Luminaire efficacy (lm/W)	136
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	53
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No

START Waterproof Slim 1500 IP65 7200lm 840 0046372

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288463728
Warranty	5 years
Dimming method	N/A

Photometry

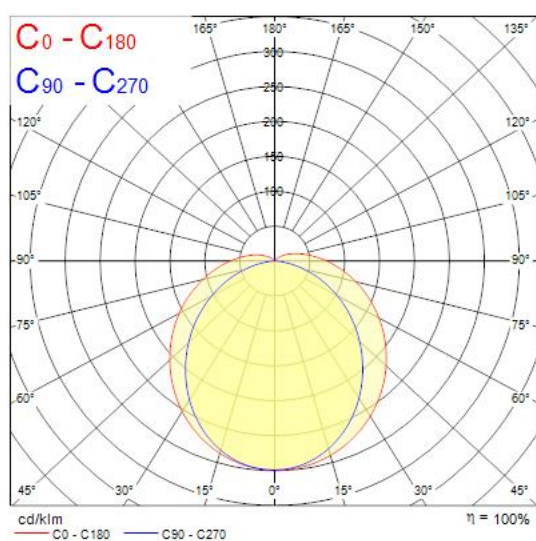

Technical drawings

