


START eco Downlight 195 2100lm 840
0053917

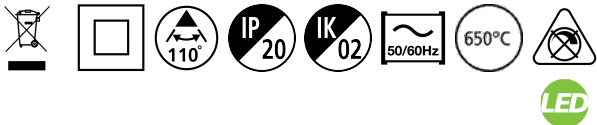

Features

- START eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 24W; 2100Lm; 88Lm/W; 4000K.


Product Overview

Product name	START eco Downlight 195 2100lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2100
Luminaire efficacy (lm/W)	88
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white

START eco Downlight 195 2100lm 840 0053917

IP rating	IP20
IK rating	IK02
Product EAN number	5410288539171
Warranty	3 years
Dimming method	N/A

Photometry

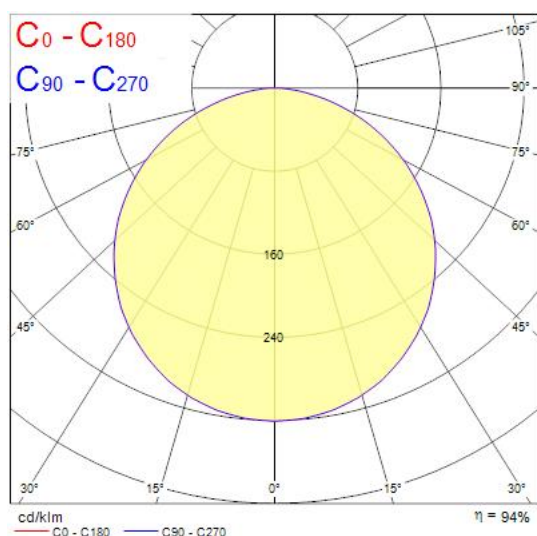

Technical drawings

