

Raiden IP66 30KLM 840 Asymmetric Wide DALI 2824102



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, DALI dimmable, 28800lm, 221W, 130lm/W, CRI80, Asymmetric Wide beam angle 110°50°, 100000 hrs L90B50 lifespan, 561x569x76mm (LxWxH) dimensions, 12.8kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

Product Overview

Product name	Raiden IP66 30KLM 840 Asymmetric Wide DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	28800
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	110°50'
Photobiological Risk Group	RG1
Total power consumption (W)	221
Electrical protection	Class I
Dimmable	Yes
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08

Concord

Raiden IP66 30KLM 840 Asymmetric Wide DALI 2824102

Product EAN number

5025768241026


Warranty

5 years

Dimming method

DALI-2

Photometry

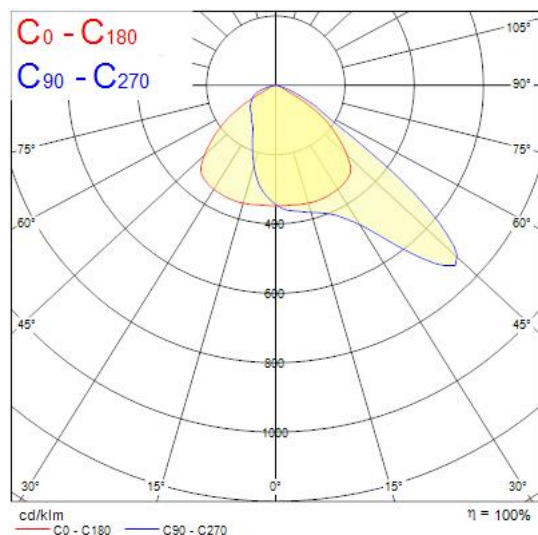

Technical drawings

