


OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
0005365

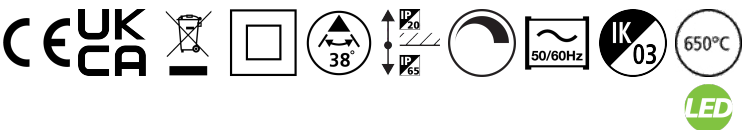

Features

- Integrated LED recessed spotlight, 2-axis adjustable (horizontal rotation 360°, vertical tilt 30°) brushed chrome bezel colour, 3 CCT options of 2700-3000-4000k, lumen up to 550lm, , 5.4W, dimmable trailing/leading edge, 38° degree beam angle, aluminium and steel body, low profile 37mm recessed depth, IP65 frontal degree, IK03, loop-in/loop-out terminals for fast wiring, 68mm cutout, clear lens. Air-proof, to limit air leakage when used in residential applications within the building’s thermal envelope. Directly coverable with insulation material according to EN60598-1


Product Overview

Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278507
Fixture luminous flux (lm)	530
Luminaire efficacy (lm/W)	98
Colour temperature (K)	3000
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	5.4

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME 0005365


Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	Chrome
IP rating	IP65/20
IK rating	IK03
Product EAN number	5410288053653
Warranty	5 years
Dimming method	Mains: leading / trailing edge

Photometry

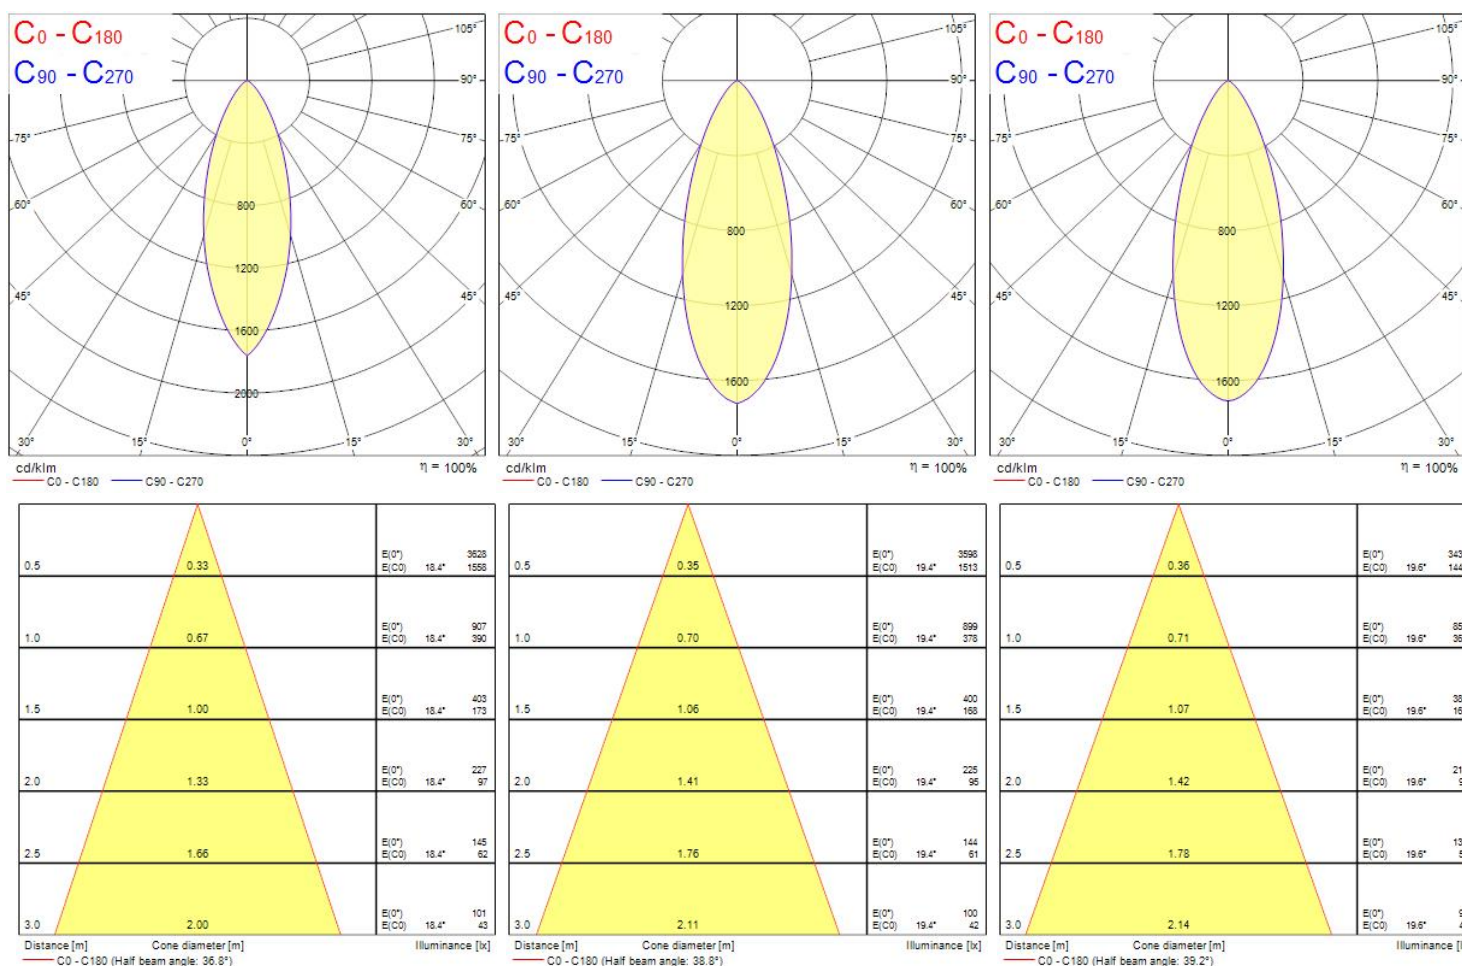

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
0005365

Technical drawings

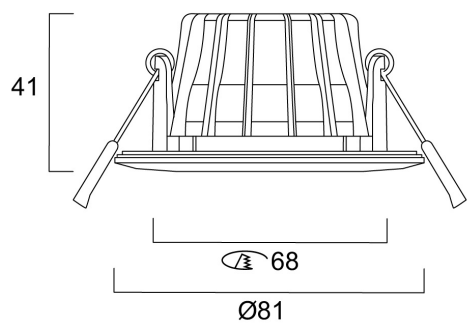

Data table

GENERAL DATA

Product name	OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278507
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	530
----------------------------	-----

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME 0005365

Luminaire efficacy (lm/W)	98
Colour temperature (K)	3000
Correlated colour temperature range (K)	2700 - 4000
Light colour	Cool White
CRI (Ra)	90
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Distribution type	Symmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	5.4
Mains voltage (V)	220-240V
Lamp power factor	0.8
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	42
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	130
Inrush Current (A)	2
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	250
Max. Luminaires per 13A C Breaker	300
Max. Luminaires per 16A C Breaker	400
Max. Luminaires per 20A C Breaker	500
Max. Luminaires per 10A B Breaker	200
Max. Luminaires per 13A B Breaker	250
Max. Luminaires per 16A B Breaker	300

OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME 0005365

Max. Luminaires per 20A B Breaker	400
-----------------------------------	-----

LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B10	100000
------------------	--------

Lifespan L90 B10	50000
------------------	-------

PHYSICAL DATA

Housing colour	Chrome
----------------	--------

IP rating	IP65/20
-----------	---------

IK rating	IK03
-----------	------

Diffuser finish	Other
-----------------	-------

Diffuser material	None
-------------------	------

Reflector finish	None
------------------	------

Nominal Product Height (mm)	45.5
-----------------------------	------

Nominal Product Diameter (mm)	81
-------------------------------	----

Cutout Dimensions (W x L in mm or Diameter in mm)	68
--	----

Weight (kg)	0.21
-------------	------

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288053653
--------------------	---------------

Packaging single length / height (cm)	11.5
---------------------------------------	------

Packaging single width (cm)	8.0
-----------------------------	-----

Packaging single depth (cm)	14.4
-----------------------------	------

DUN14 (inner)	25410288053657
---------------	----------------

Units per inner package	6
-------------------------	---

Packaging inner length / height (cm)	29.9
--------------------------------------	------

Packaging inner width (cm)	25.2
----------------------------	------

Packaging inner depth (cm)	12.8
----------------------------	------

DUN14 (outer)	15410288053650
---------------	----------------

Units per outer package	36
-------------------------	----

Packaging outer length / height (cm)	52.1
--------------------------------------	------



OBICO 68 IP65 530lm 3CCT DIM ADJ BRUSHED CHROME
0005365

Packaging outer width (cm)	31.5
Packaging outer depth (cm)	41.1

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No