



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 40W; 126lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.



Product Overview

Product name	Resisto 1200 IP66 5000lm 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357048
Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	126
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	680

Resisto 1200 IP66 5000lm 840 EM 0010219

Luminous flux (emergency) (lm)	680
Total power consumption (W)	40
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102191
Warranty	5 years
Dimming method	N/A

Photometry

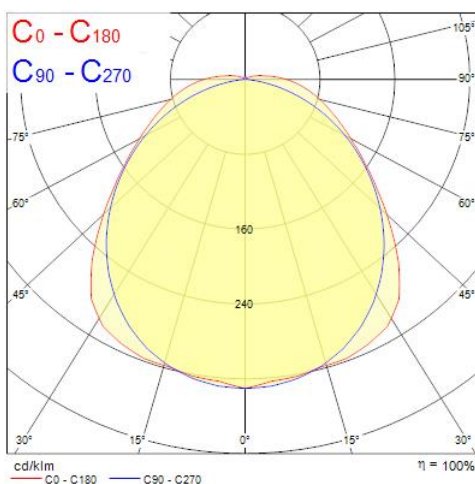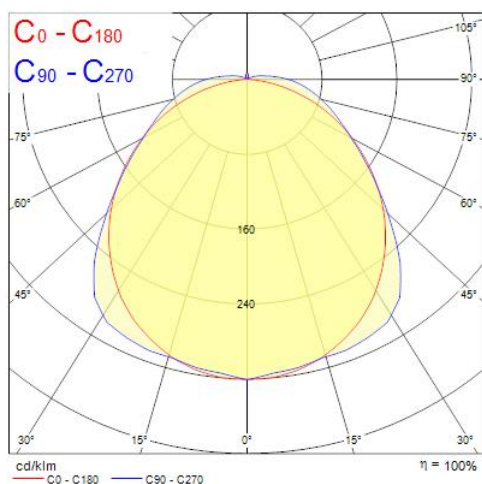


0.5	1.37 1.40	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	873 90 86
1.0	2.74 2.80	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	218 22 21
1.5	4.11 4.21	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	97 10 10
2.0	5.49 5.61	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	55 6 6
2.5	6.86 7.01	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	35 4 3
3.0	8.23 8.41	E(0°) E(C90) E(C0)	53.9° 53.9° 54.5°	24 2 2


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 109.0°)
— C90 - C270 (Half beam angle: 107.8°)

Resisto 1200 IP66 5000lm 840 EM
0010219

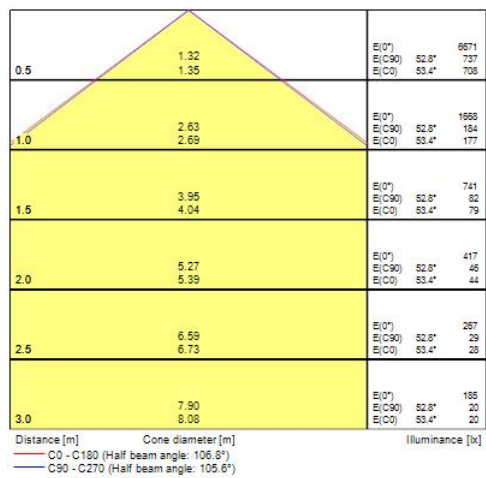

Technical drawings

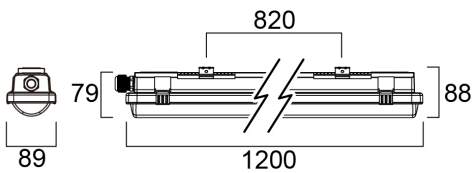

Data table

GENERAL DATA

Product name	Resisto 1200 IP66 5000lm 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate

Resisto 1200 IP66 5000lm 840 EM 0010219

Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4357048
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	126
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	680
Luminous flux (emergency) (lm)	680
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	40
Mains voltage (V)	220-240V
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current

Resisto 1200 IP66 5000lm 840 EM 0010219

No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	41
Max. Luminaires per 13A C Breaker	53
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	82
Max. Luminaires per 10A B Breaker	41
Max. Luminaires per 13A B Breaker	53
Max. Luminaires per 16A B Breaker	65
Max. Luminaires per 20A B Breaker	82

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

PHYSICAL DATA

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	87

Resisto 1200 IP66 5000lm 840 EM 0010219

Nominal Product Height (mm)	80
Weight (kg)	2.16

PACKAGING

Single packaging type	Carton
Product EAN number	5410288102191
Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	05410288102191
Units per outer package	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

SAFETY DATA

Optimal operating condition (°C)	5-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No