



Features

• Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; MW On/Off.


Product Overview

Product name	Resisto 1200 IP66 MW 5000lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357050
Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I

Resisto 1200 IP66 MW 5000lm 840
0010221


Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102214
Warranty	5 years
Dimming method	N/A

Photometry

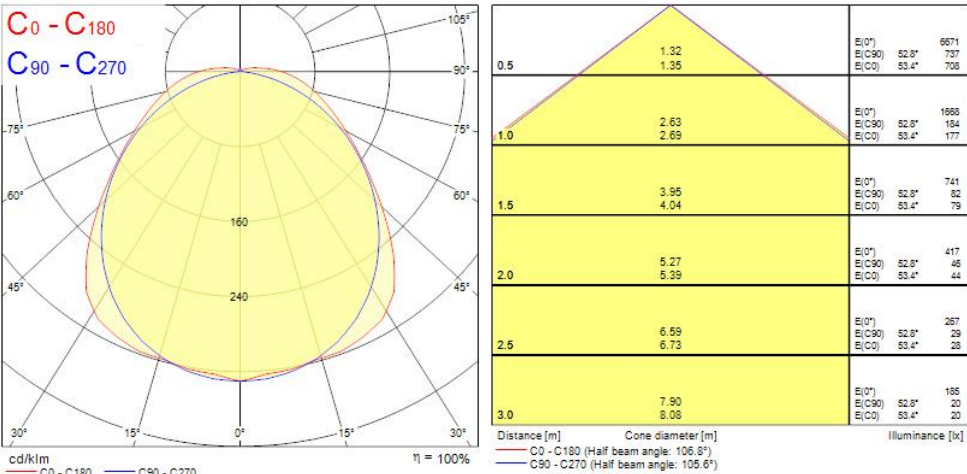

Resisto 1200 IP66 MW 5000lm 840 0010221

Technical drawings

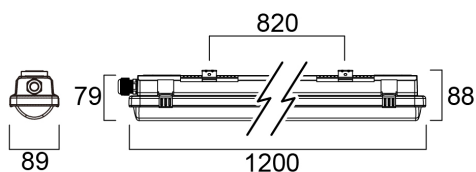

Data table

GENERAL DATA

Product name	Resisto 1200 IP66 MW 5000lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4357050
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140

Resisto 1200 IP66 MW 5000lm 840 0010221

Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	36
Mains voltage (V)	220-240V
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	41
Max. Luminaires per 13A C Breaker	53
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	82
Max. Luminaires per 10A B Breaker	41
Max. Luminaires per 13A B Breaker	53

Resisto 1200 IP66 MW 5000lm 840 0010221

Max. Luminaires per 16A B Breaker	65
-----------------------------------	----

Max. Luminaires per 20A B Breaker	82
-----------------------------------	----

LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B20	69000
------------------	-------

Lifespan L90 B10	31000
------------------	-------

PHYSICAL DATA

Housing colour	Grey
----------------	------

IP rating	IP66
-----------	------

IK rating	IK08
-----------	------

Diffuser finish	Frosted
-----------------	---------

Diffuser material	PC Polycarbonate
-------------------	------------------

Nominal Product Length (mm)	1200
-----------------------------	------

Nominal Product Width (mm)	87
----------------------------	----

Nominal Product Height (mm)	80
-----------------------------	----

Weight (kg)	1.59
-------------	------

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288102214
--------------------	---------------

Packaging single length / height (cm)	120.5
---------------------------------------	-------

Packaging single width (cm)	10.0
-----------------------------	------

Packaging single depth (cm)	8.5
-----------------------------	-----

DUN14 (outer)	05410288102214
---------------	----------------

Units per outer package	1
-------------------------	---

Packaging outer length / height (cm)	120.5
--------------------------------------	-------

Packaging outer width (cm)	10.0
----------------------------	------

Packaging outer depth (cm)	8.5
----------------------------	-----

SAFETY DATA

Optimal operating condition (°C)	-20-40
----------------------------------	--------



Resisto 1200 IP66 MW 5000lm 840
0010221

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No