




Features

- Provides the necessary UVB radiation for reptile habitats. Daylight colour temperature 6500K. This lamp emits UV-radiation, Avoid exposure.

Product Overview

Product name	F15W/Reptistar UV-B 5% Retail
Technology	Fluorescent
Lamp shape	Tubular shape
Type	T8
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	SPG
ETIM Class	EC002962
E-number SE	8356664
E-number Norway	3801009
Luminous flux (lm)	300
Colour temperature (K)	6500
Light colour	UV
Wattage (W)	15.00
Product Voltage (V)	55
Dimmable	Yes
Average life (Nominal) (h)	14000
Product EAN number	5410288007311
Dimming method	Mains: leading / trailing edge

Technical drawings

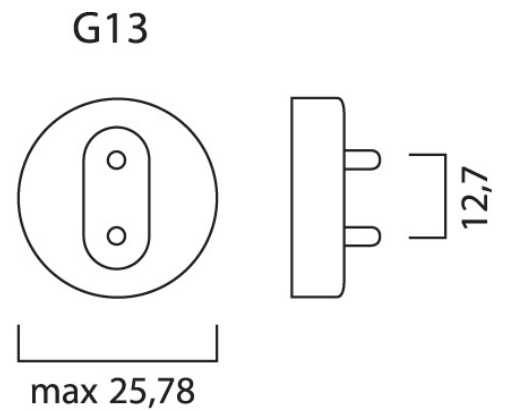

Data table

GENERAL DATA

Product name	F15W/Reptistar UV-B 5% Retail
Technology	Fluorescent
Lamp shape	Tubular shape
Type	T8
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	SPG
Operating temperature range (°C)	-15°C...+40°C
ETIM Class	EC002962
E-number SE	8356664
E-number Norway	3801009

OPTICAL DATA

Luminous flux (lm)	300
--------------------	-----

F15W/Reptistar UV-B 5% Retail 0000731

Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	6500
Light colour	UV
Adjustable chromaticity	N

ELECTRICAL DATA

Wattage (W)	15.00
Watt (Rated) - High frequency (W)	13.50
Current (A)	0.310
Product Voltage (V)	55
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	310

LIFETIME DATA

Average life (Nominal) (h)	14000
----------------------------	-------

PHYSICAL DATA

Nominal Product Length (mm)	450.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	437.4
Length base to pin Min-Max (mm) - B	442.1-444.5
Max. Lamp Length (mm) - C/L	451.6
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.062

PACKAGING

Single packaging type	Carton
Product EAN number	5410288007311
Packaging single length / height (cm)	67.1

F15W/Reptistar UV-B 5% Retail 0000731

Packaging single width (cm)	2.7
Packaging single depth (cm)	2.7
DUN14 (outer)	15410288007318
Units per outer package	10
Packaging outer length / height (cm)	70.1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	14.7

SAFETY DATA

Lamp mercury content (mg)	2.80
Optimal operating condition (°C)	-15-40
Breakage cleaning instructions	Applicable
Special purpose lamp	Yes
Intended purpose	High UV Content (>2mW/klm)(Terrarium High UV lamps)
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not suitable for household