

## Features

- Compact, energy efficient and exceptional value LED GU10 lamp Same shape and size as halogen GU10 lamp Compact Cluster SMD technology enabling high efficiency with halogen look Reduced visible heat sink from the front Available in 110 degree beam angle High lumen efficacy 15,000 hours average rated life 3 years warranty



## Product Overview

|                                 |                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------|
| Product name                    | RefLED ES50 V6 320LM 840 110 SL10                                                   |
| Technology                      | LED                                                                                 |
| Watt (Rated) (W)                | 4.2                                                                                 |
| Type                            | LED exchangeable                                                                    |
| Cap/Base                        | GU10                                                                                |
| Fixture rating                  | Open                                                                                |
| General application             | Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail |
| ETIM Class                      | EC001959                                                                            |
| Colour temperature (K)          | 4000                                                                                |
| Light colour                    | Cool White                                                                          |
| CRI (Ra)                        | 80                                                                                  |
| Colour Consistency (SDCM)       | 6                                                                                   |
| Colour Variation Initial (SDCM) | 6                                                                                   |
| Beam Angle (°)                  | 110                                                                                 |
| Photobiological Risk Group      | RG1                                                                                 |
| Wattage (W)                     | 4.2                                                                                 |
| Product Voltage (V)             | 230                                                                                 |

RefLED ES50 V6 320LM 840 110 SL10  
0029175

|                            |               |
|----------------------------|---------------|
| Dimmable                   | No            |
| Average life (Nominal) (h) | 15000         |
| Product EAN number         | 5410288291758 |
| Warranty                   | 3 years       |

Technical drawings

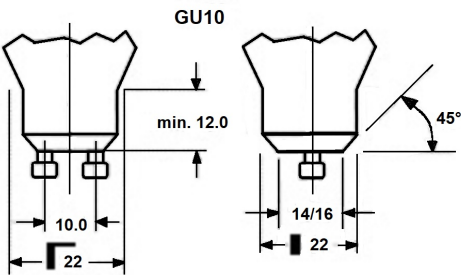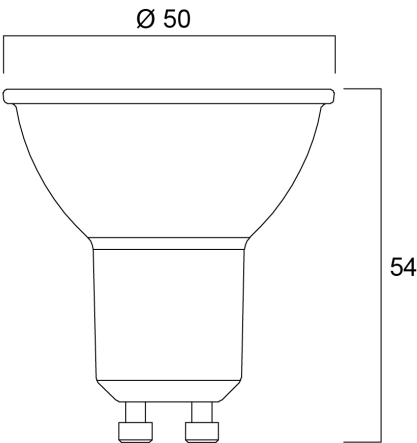

Data table

GENERAL DATA

|                                         |                                                                                     |
|-----------------------------------------|-------------------------------------------------------------------------------------|
| Product name                            | RefLED ES50 V6 320LM 840 110 SL10                                                   |
| Technology                              | LED                                                                                 |
| Watt (Rated) (W)                        | 4.2                                                                                 |
| Type                                    | LED exchangeable                                                                    |
| Cap/Base                                | GU10                                                                                |
| Fixture rating                          | Open                                                                                |
| General application                     | Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail |
| Operating temperature range (°C)        | -20°C...+40°C                                                                       |
| Performance ambient temperature Tq (°C) | 25                                                                                  |

## RefLED ES50 V6 320LM 840 110 SL10 0029175

|            |          |
|------------|----------|
| ETIM Class | EC001959 |
| Warranty   | 3 years  |

### OPTICAL DATA

|                                              |            |
|----------------------------------------------|------------|
| Colour temperature (K)                       | 4000       |
| Light colour                                 | Cool White |
| CRI (Ra)                                     | 80         |
| Colour Consistency (SDCM)                    | 6          |
| Colour Variation Initial (SDCM)              | 6          |
| Luminous Intensity (cd)                      | 170        |
| Beam Angle (°)                               | 110        |
| Photobiological Risk Group                   | RG1        |
| Lumen maintenance at end of nominal life (%) | 70         |

### ELECTRICAL DATA

|                                                   |         |
|---------------------------------------------------|---------|
| Wattage (W)                                       | 4.2     |
| Equivalent watt (W)                               | 45      |
| Product Voltage (V)                               | 230     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >50000  |
| Transformer required                              | No      |
| Dimmable                                          | No      |
| Inrush Current (A)                                | 3.9     |
| Inrush Duration (µs)                              | 4100    |
| Lamp Energy Label (class)                         | F       |
| Nominal Frequency (Hz)                            | 50/60Hz |
| Max. Luminaires per 16A C Breaker                 | 123     |
| Max. Luminaires per 16A B Breaker                 | 74      |

### LIFETIME DATA

|                            |       |
|----------------------------|-------|
| Lifespan L70 B50           | 15000 |
| Average life (Nominal) (h) | 15000 |

## RefLED ES50 V6 320LM 840 110 SL10 0029175

|                          |       |
|--------------------------|-------|
| Average life (Rated) (h) | 15000 |
|--------------------------|-------|

### PHYSICAL DATA

|                               |      |
|-------------------------------|------|
| Nominal Product Height (mm)   | 54   |
| Nominal Product Diameter (mm) | 50   |
| Weight (kg)                   | 0.35 |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288291758  |
| Packaging single length / height (cm) | 8.2            |
| Packaging single width (cm)           | 19.5           |
| Packaging single depth (cm)           | 10.4           |
| DUN14 (outer)                         | 15410288291755 |
| Units per outer package               | 6              |
| Packaging outer length / height (cm)  | 9.2            |
| Packaging outer width (cm)            | 40.3           |
| Packaging outer depth (cm)            | 32.7           |


### SAFETY DATA

|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Optimal operating condition (°C)    | -20-40                                     |
| Breakage cleaning instructions      | Not applicable                             |
| Special purpose lamp                | No                                         |
| Dry applications use only           | Yes                                        |
| Suitable for household illumination | Yes                                        |
| Safety message                      | Not Suitable for totally enclosed fixtures |

Energy label



0029175

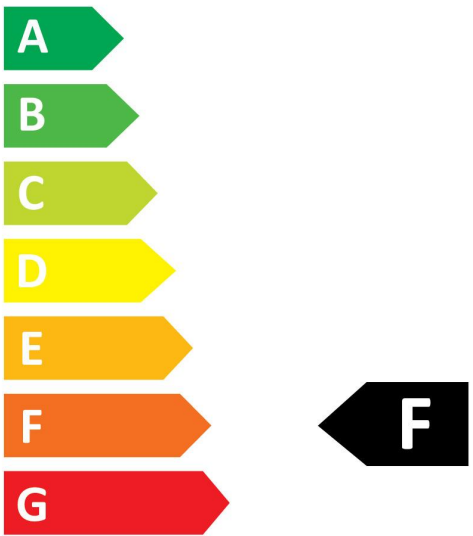


5 kWh/1000h



2019/2015



0029175

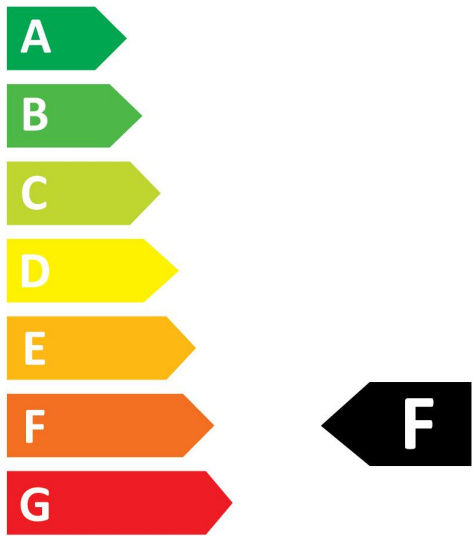

5 kWh/1000h



2019/2015