



Features

- LED Striplight replacement for incandescent lamp
- High lumen output: up to 806lm 15,000 hours average rated life Up to 85% energy saving Creates a warm ambiance similar to traditional lamps Perfect for kitchen, mirror lighting, shaver lighting, bathroom 3 year warranty


Product Overview

Product name	ToLEDo Striplight V3 500MM 700LM S14s
Technology	LED
Watt (Rated) (W)	7.5
Type	LED exchangeable
Cap/Base	S14s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741151
Luminous flux (lm)	700
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	7.5
Product Voltage (V)	230
Dimmable	No

ToLEDo Striplight V3 500MM 700LM S14s
0028106

Average life (Nominal) (h)	15000
Product EAN number	5410288281063
Warranty	3 years

Technical drawings

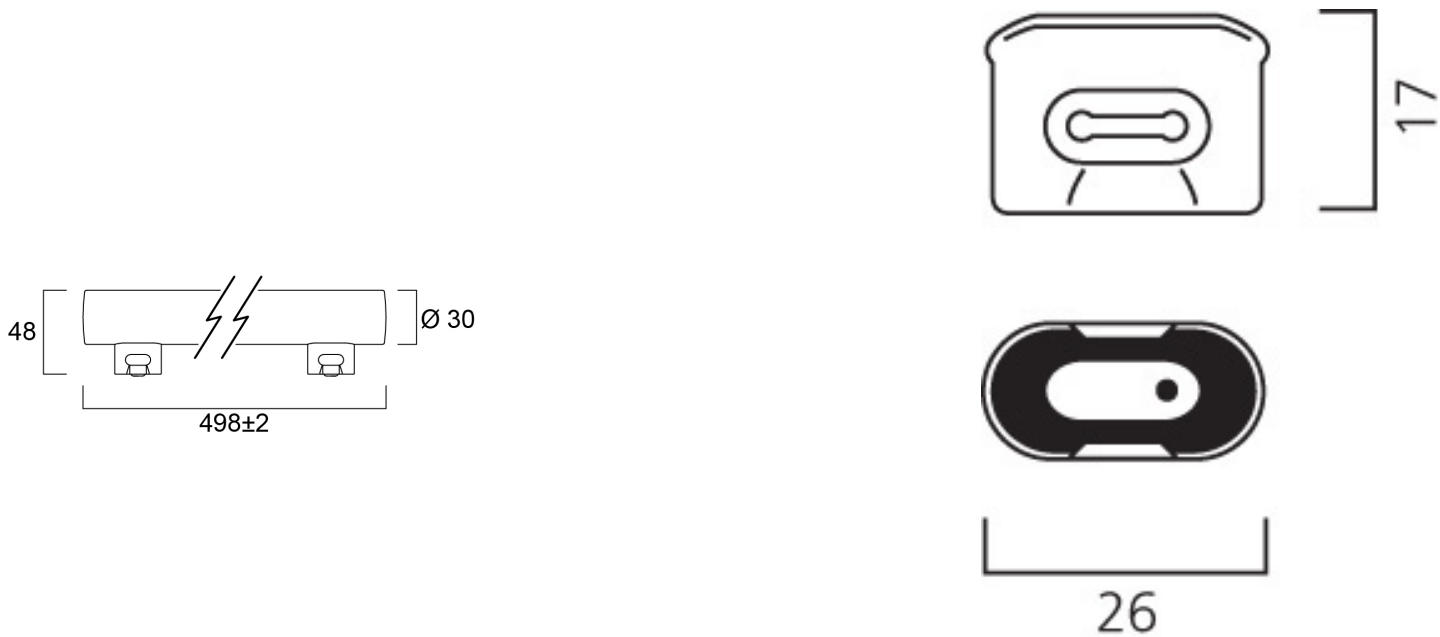

Data table

GENERAL DATA

Product name	ToLEDo Striplight V3 500MM 700LM S14s
Technology	LED
Watt (Rated) (W)	7.5
Type	LED exchangeable
Cap/Base	S14s
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C

ToLEDo Striplight V3 500MM 700LM S14s 0028106

Performance ambient temperature Tq (°C)	25
---	----

ETIM Class	EC001959
------------	----------

E-number FI	4741151
-------------	---------

Warranty	3 years
----------	---------

OPTICAL DATA

Luminous flux (lm)	700
--------------------	-----

Luminous flux (Rated) (lm)	700
----------------------------	-----

Colour temperature (K)	2700
------------------------	------

Correlated colour temperature range (K)	2430 - 2970
---	-------------

Light colour	Homelight
--------------	-----------

CRI (Ra)	80
----------	----

Colour Variation Initial (SDCM)	6
---------------------------------	---

Photobiological Risk Group	RG0
----------------------------	-----

Lumen maintenance at end of nominal life (%)	70
--	----

ELECTRICAL DATA

Wattage (W)	7.5
-------------	-----

Equivalent watt (W)	50
---------------------	----

Starting time (max) (s)	0.5
-------------------------	-----

Warm-up time to 60% of full light (max) (s)	1
---	---

Product Voltage (V)	230
---------------------	-----

Lamp power factor	1
-------------------	---

Control gear required	No
-----------------------	----

No. Of switching cycles before premature failures	>100000
---	---------

Transformer required	No
----------------------	----

Dimmable	No
----------	----

Inrush Current (A)	2.8
--------------------	-----

Inrush Duration (µs)	300
----------------------	-----

Lamp Energy Label (class)	F
---------------------------	---

ToLEDo Striplight V3 500MM 700LM S14s 0028106

kWh per 1000 hours burning time	8
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	287
Max. Luminaires per 13A C Breaker	373
Max. Luminaires per 16A C Breaker	57
Max. Luminaires per 20A C Breaker	575
Max. Luminaires per 16A B Breaker	29

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

PHYSICAL DATA

Nominal Product Length (mm)	498
Nominal Product Diameter (mm)	48
Weight (kg)	0.116

PACKAGING

Single packaging type	Carton
Product EAN number	5410288281063
Packaging single length / height (cm)	50.4
Packaging single width (cm)	5.0
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288281060
Units per outer package	6
Packaging outer length / height (cm)	51.4
Packaging outer width (cm)	10.6
Packaging outer depth (cm)	10.1

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable


ToLEDo Striplight V3 500MM 700LM S14s 0028106

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0028106

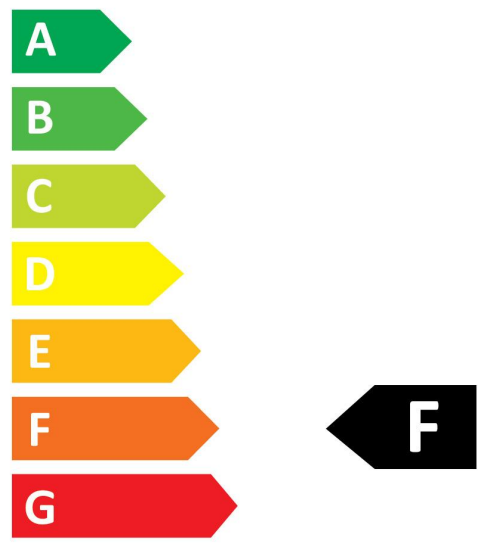


8 kWh/1000h



2019/2015



0028106

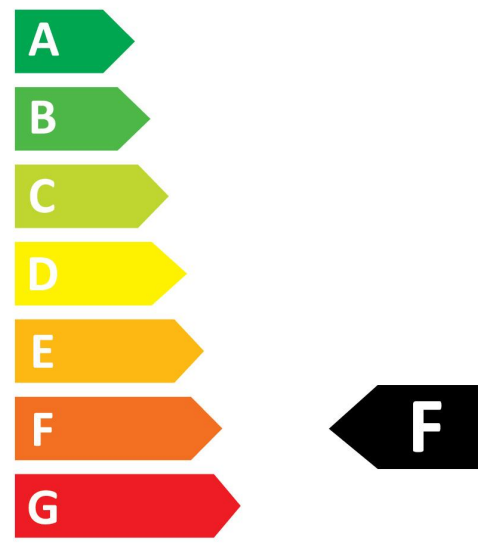

8 kWh/1000h



2019/2015