

RefLED Retro MR11 184LM 830 36° SL 0029238



Features

- LED MR11 range with the same look and feel of traditional halogen MR11 lamp Full glass design - means no colours clashing between the lamp and fixture Available in 36 degree beam angle 15,000 hours average rated life Switching cycles: 50,000 Colour rendering: CRI80 Lamp voltage: 12V AC/DC Works with magnetic and compatible electronic transformers* Warranty: 3 Years


Product Overview

Product name	RefLED Retro MR11 184LM 830 36° SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741116
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	2.5
Product Voltage (V)	12
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288292380


RefLED Retro MR11 184LM 830 36° SL
0029238

Warranty3 years

Technical drawings

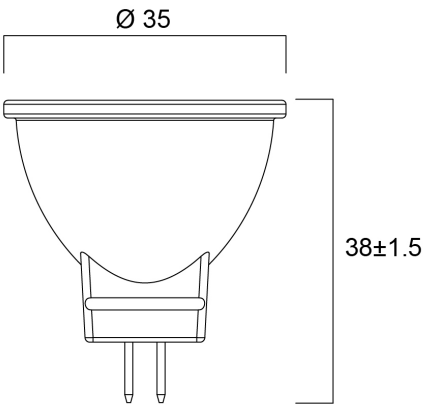

GZ4/GU4

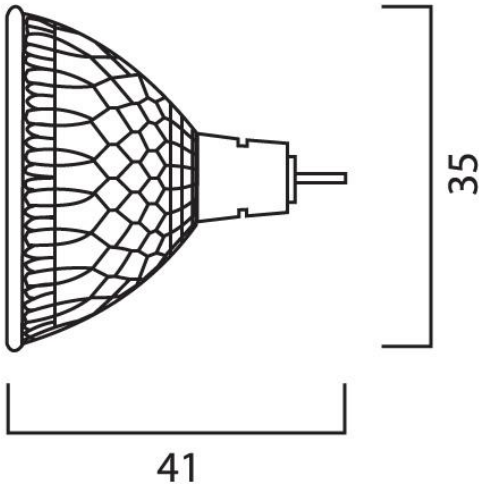

Data table

GENERAL DATA

Product name	RefLED Retro MR11 184LM 830 36° SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741116

RefLED Retro MR11 184LM 830 36° SL 0029238

Warranty	3 years
----------	---------

OPTICAL DATA

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Luminous Intensity (cd)	400
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Wattage (W)	2.5
Equivalent watt (W)	20
Product Voltage (V)	12
Control gear required	No
No. Of switching cycles before premature failures	>100000
Transformer required	Yes
Dimmable	No
Inrush Current (A)	8
Inrush Duration (µs)	500
Lamp Energy Label (class)	G
Max. Luminaires per 16A C Breaker	32
Max. Luminaires per 16A B Breaker	20

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

RefLED Retro MR11 184LM 830 36° SL 0029238

PHYSICAL DATA

Nominal Product Length (mm)	38
Nominal Product Diameter (mm)	35
Weight (kg)	0.014

PACKAGING

Single packaging type	Carton
Product EAN number	5410288292380
Packaging single length / height (cm)	5.1
Packaging single width (cm)	4.5
Packaging single depth (cm)	7.6
DUN14 (inner)	25410288292384
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	10.3
Packaging inner depth (cm)	9.1
DUN14 (outer)	15410288292387
Units per outer package	36
Packaging outer length / height (cm)	33.2
Packaging outer width (cm)	18.7
Packaging outer depth (cm)	20.9

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Suitable for approved transf./dimmers

RefLED Retro MR11 184LM 830 36° SL
0029238

Energy label



0029238




3
kWh/1000h



2019/2015



0029238

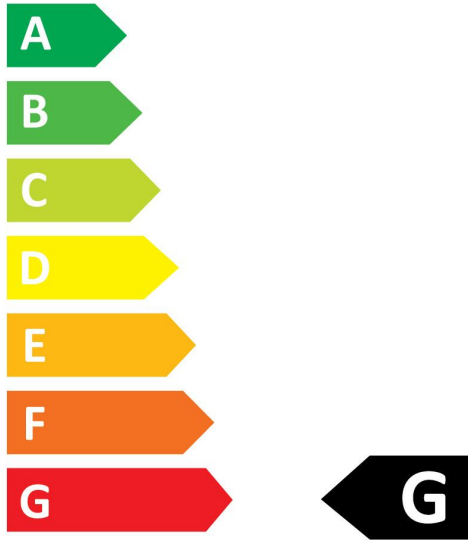

3
kWh/1000h



2019/2015