



Features

- Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps
- Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes
- High lumen package - 1000lm
- High lumen efficacy - 100 lm/W
- Switching cycles - 200,000X
- Average life 40,000 hours
- lifespan
- Lamp length - 600mm
- Wide beam angle
- High power factor
- Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications
- Suitable for operation with electromagnetic gears / CCG and direct mains operation (220-240V)
- 3-Year warranty



Product Overview

Product name	ToLEDo T8 V7 2FT 1000LM 865 RL
Technology	LED
Watt (Rated) (W)	10
Lamp shape	Tube, double-ended
Type	LED exchangeable
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941311
Luminous flux (lm)	1000
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6

ToLEDo T8 V7 2FT 1000LM 865 RL
0029293

Beam Angle (°)	170
Photobiological Risk Group	RG0
Wattage (W)	10
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	40000
IP rating	IP20
Product EAN number	5410288292939
Warranty	3 years

Technical drawings

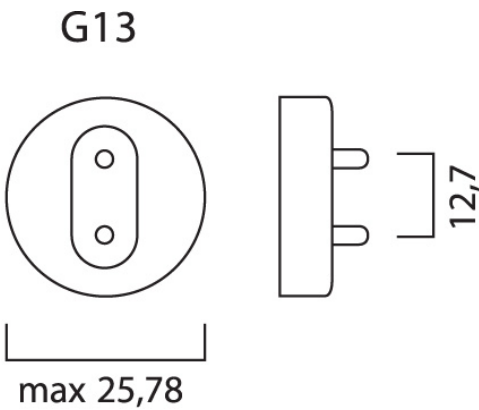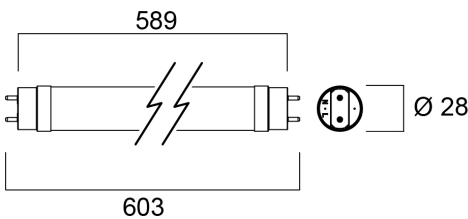

Data table

GENERAL DATA	
Product name	ToLEDo T8 V7 2FT 1000LM 865 RL
Technology	LED
Watt (Rated) (W)	10
Lamp shape	Tube, double-ended
Type	LED exchangeable
Cap/Base	G13

ToLEDo T8 V7 2FT 1000LM 865 RL 0029293

Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4941311
Warranty	3 years

OPTICAL DATA

Luminous flux (lm)	1000
Luminous flux (Rated) (lm)	1000
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Wattage (W)	10
Product Voltage (V)	230
Lamp power factor	0.91
Control gear required	No
No. Of switching cycles before premature failures	>200000
Transformer required	No
Dimmable	No
Inrush Current (A)	15.6
Inrush Duration (µs)	90

ToLEDo T8 V7 2FT 1000LM 865 RL 0029293

Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	158
Max. Luminaires per 16A B Breaker	95

LIFETIME DATA

Lifespan L70 B50	40000
Average life (Nominal) (h)	40000
Average life (Rated) (h)	40000

PHYSICAL DATA

IP rating	IP20
Nominal Product Length (mm)	602.8
Nominal Product Diameter (mm)	28
Weight (kg)	0.14

PACKAGING

Single packaging type	Carton
Product EAN number	5410288292939
Packaging single length / height (cm)	65.2
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (outer)	15410288292936
Units per outer package	10
Packaging outer length / height (cm)	69.1
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	10.5

SAFETY DATA

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No

ToLEDo T8 V7 2FT 1000LM 865 RL
0029293

Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture

Energy label

**ENERG**
SYLVANIA
0029293

A

B

C

D

E

F

G

F

10

kWh/1000h

2019/2015

**ENERG**
SYLVANIA
0029293

A

B

C

D

E

F

G

F

10

kWh/1000h

2019/2015