



Features

- High performance LED PAR38 lamp with the same look and feel of traditional PAR lamps Glass construction - means no colours clashing between the lamp and fixture Reduced visible heatsink from the front Mercury-free solution Lower maintenance cost RefLED™ RT PAR38 IP65 is also suitable for outdoor applications when used with IP65 rated luminaires Lifetime: up to 25,000 hours High lumen efficacy Dimmable with approved dimmers* 3 year warranty Suitable for general lighting and accent lighting for hotels, restaurants, bars, lobbies, corridors and halls



Product Overview

Product name	RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL
Technology	LED
Watt (Rated) (W)	15
Type	LED exchangeable
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail
ETIM Class	EC001959
E-number FI	4741082
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	40
Photobiological Risk Group	RG1
Wattage (W)	15
Product Voltage (V)	230

RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL
0029200

Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288292007
Warranty	3 years

Technical drawings

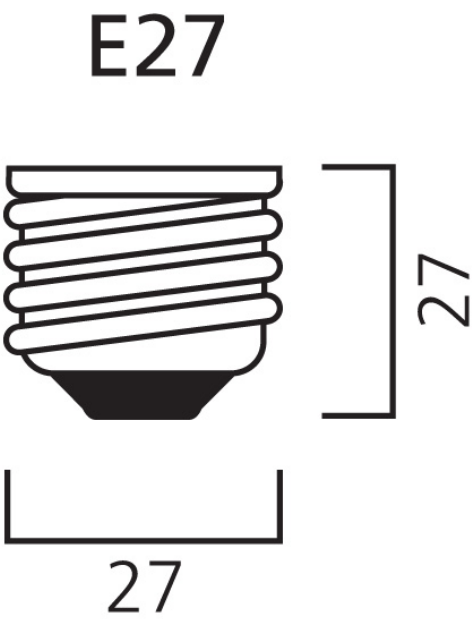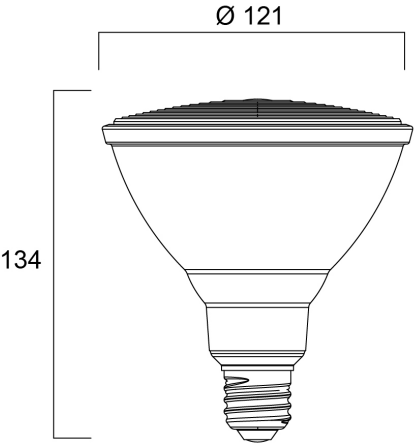

Data table

GENERAL DATA	
Product name	RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL
Technology	LED
Watt (Rated) (W)	15
Type	LED exchangeable
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer, Retail

RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL 0029200

Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741082
Warranty	3 years

OPTICAL DATA

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Luminous Intensity (cd)	2400
Beam Angle (°)	40
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Wattage (W)	15
Equivalent watt (W)	140
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	No
Dimmable	Yes
Inrush Current (A)	2.4
Inrush Duration (µs)	50
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL 0029200

Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	134
Nominal Product Diameter (mm)	121
Weight (kg)	0.3

PACKAGING

Single packaging type	Carton
Product EAN number	5410288292007
Packaging single length / height (cm)	10.2
Packaging single width (cm)	10.2
Packaging single depth (cm)	11.1
DUN14 (outer)	15410288292004
Units per outer package	6
Packaging outer length / height (cm)	33.3
Packaging outer width (cm)	23.6
Packaging outer depth (cm)	15.7

SAFETY DATA


Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Dimmable with approved dimmers

RefLED Retro PAR38 V2 DIM 1200L 830 IP65 40 SL
0029200

Energy label



0029200

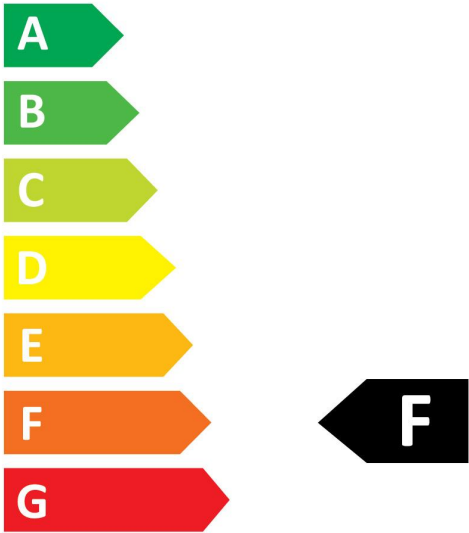


15
kWh/1000h



2019/2015



0029200

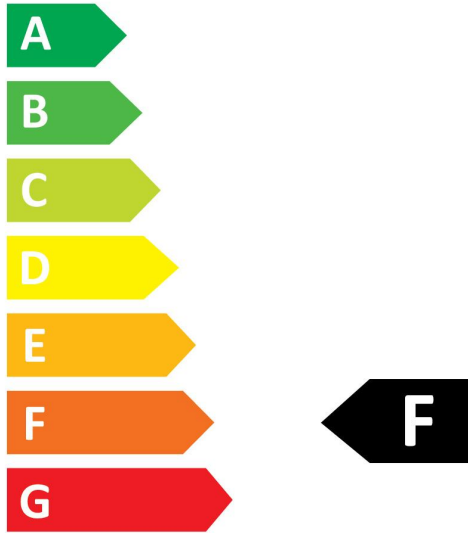

15
kWh/1000h



2019/2015