




Features

• SylSafe Exit-Mod EX R EM3 MT MS is a recessed emergency exit sign. Comes with ISO7010 compliant legend pack. Arrows left, right, up, down and a blank sheet for single sided versions. EC legend pack is available as accessory. Viewing distance 26m. White housing colour. Maintained 3hr emergency operation with NiMH rechargeable battery. Recharge period 24 hours. 4.9W, IK03, IP20. Power Factor 0.49. Class II electrical construction.

Product Overview

Product name	SylSafe Exit-Mod EX R EM3 MT MS
Technology	LED
Type	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Fixture luminous flux (lm)	-
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288417493
Warranty	5 years

Technical drawings

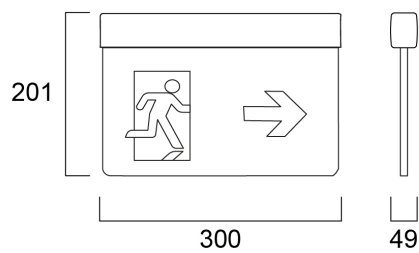

Data table

GENERAL DATA

Product name	SylSafe Exit-Mod EX R EM3 MT MS
Technology	LED
Type	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	-
Emergency duration (h)	3

ELECTRICAL DATA

Mains voltage (V)	230-240V
-------------------	----------

## SylSafe Exit-Mod EX R EM3 MT MS 0041749

Lamp power factor	0.49
Electrical protection	Class II
Control gear required	Yes
Drive current (mA)	60
Nominal Frequency (Hz)	50/60Hz

### PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	300
Nominal Product Width (mm)	49
Nominal Product Height (mm)	201
Weight (kg)	0.866

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288417493
Packaging single length / height (cm)	31.0
Packaging single width (cm)	22.6
Packaging single depth (cm)	4.4
DUN14 (outer)	05410288417493
Units per outer package	1
Packaging outer length / height (cm)	31.0
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	4.4

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No