

START Downlight 225 IP44 2275lm 830
0030330



Features

• Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2275LM, 23W, 99lm/W, 3000K, Driver Current: 630mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 65x225mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 225 IP44 2275lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278155
Fixture luminous flux (lm)	2275
Luminous flux (lm)	2275
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	74
Glare control	< 25

START Downlight 225 IP44 2275lm 830 0030330


Photobiological Risk Group	RG0
Total power consumption (W)	23
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303307
Warranty	5 years
Dimming method	N/A

Photometry

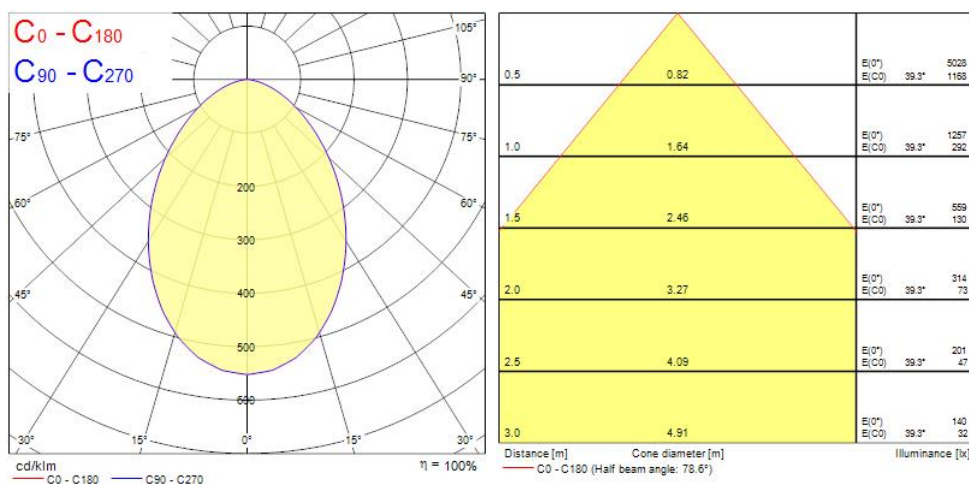

START Downlight 225 IP44 2275lm 830
0030330

Technical drawings

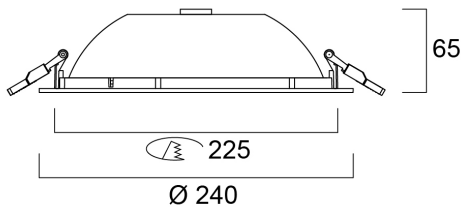

Data table

GENERAL DATA

Product name	START Downlight 225 IP44 2275lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278155
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2275
Luminous flux (lm)	2275

START Downlight 225 IP44 2275lm 830 0030330

Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	23
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	630
Inrush Current (A)	6.44
Inrush Duration (μ s)	830
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	20

START Downlight 225 IP44 2275lm 830 0030330

Max. Luminaires per 13A C Breaker	26
Max. Luminaires per 16A C Breaker	32
Max. Luminaires per 20A C Breaker	40
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 13A B Breaker	15
Max. Luminaires per 16A B Breaker	19
Max. Luminaires per 20A B Breaker	24

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	240
Cutout Dimensions (W x L in mm or Diameter in mm)	225
Weight (kg)	0.528
Recessed Depth (mm)	150

PACKAGING

Single packaging type	Carton
Product EAN number	5410288303307
Packaging single length / height (cm)	24.5
Packaging single width (cm)	24.5
Packaging single depth (cm)	8.0
DUN14 (outer)	15410288303304



START Downlight 225 IP44 2275lm 830
0030330

Units per outer package	12
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	51.0
Packaging outer depth (cm)	27.0

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No