


Start Flood Flat IP54 PIR 5000LM 840 Black
0050142

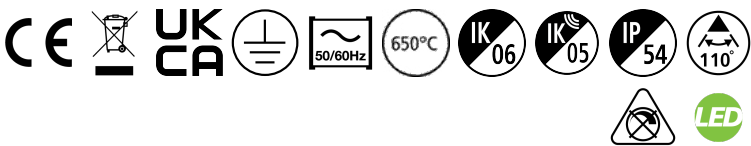

Features

• The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 5000 lm, 46 W, 109 lm/W, 4000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 235 x 190 x 58 mm (L x W x H). Weight: 0.8kg. PIR sensor included.


Product Overview

Product name	Start Flood Flat IP54 PIR 5000LM 840 Black
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579544
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	46
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)


Start Flood Flat IP54 PIR 5000LM 840 Black
0050142

Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288501420
Warranty	3 years
Dimming method	N/A

Photometry

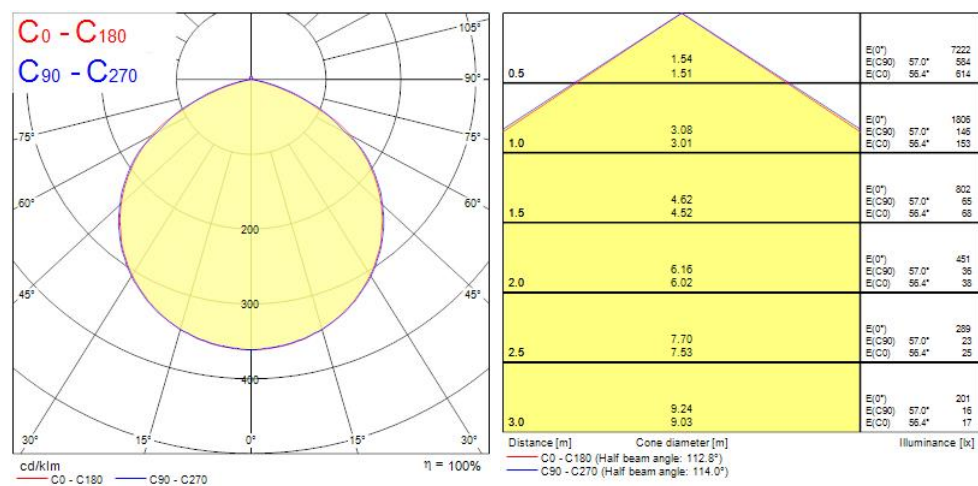

Technical drawings

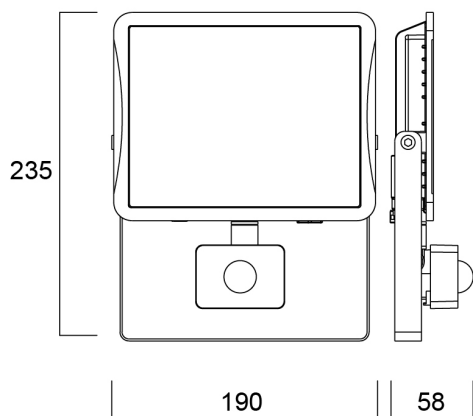

Start Flood Flat IP54 PIR 5000LM 840 Black 0050142

Data table

GENERAL DATA

Product name	Start Flood Flat IP54 PIR 5000LM 840 Black
Technology	LED
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579544
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	109
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	46
Mains voltage (V)	220-240V
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	154
Inrush Current (A)	20.6
Inrush Duration (µs)	500
Glow Wire Test (°C)	650

Start Flood Flat IP54 PIR 5000LM 840 Black 0050142

Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	15
Max. Luminaires per 13A C Breaker	19
Max. Luminaires per 16A C Breaker	25
Max. Luminaires per 20A C Breaker	30
Max. Luminaires per 10A B Breaker	9
Max. Luminaires per 13A B Breaker	12
Max. Luminaires per 16A B Breaker	14
Max. Luminaires per 20A B Breaker	18

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L80 B20	58000

PHYSICAL DATA

Housing colour	Black
IP rating	IP54
IK rating	IK06
IK rating of sensor	IK05
Nominal Product Length (mm)	235
Nominal Product Width (mm)	190
Nominal Product Height (mm)	58
Weight (kg)	0.8

PACKAGING

Single packaging type	Carton
Product EAN number	5410288501420
Packaging single length / height (cm)	19.5
Packaging single width (cm)	6.0
Packaging single depth (cm)	24.3



Start Flood Flat IP54 PIR 5000LM 840 Black
0050142

DUN14 (outer)	15410288501427
Units per outer package	6
Packaging outer length / height (cm)	38.8
Packaging outer width (cm)	20.8
Packaging outer depth (cm)	26.1

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No