




Features


- Adapting ring is suitable for the fixture of 225mm cut out. When put together, it can be used in a new cut out of 255mm- max 270mm. Outer ring of 280mm dia. RAL9003.

Product Overview

Product name	Adapting Ring RAL9003 225/255/280
Technology	Accessory
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002556
E-number FI	4278415
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288304649
Warranty	3 years

Adapting Ring RAL9003 225/255/280
0030464

Technical drawings

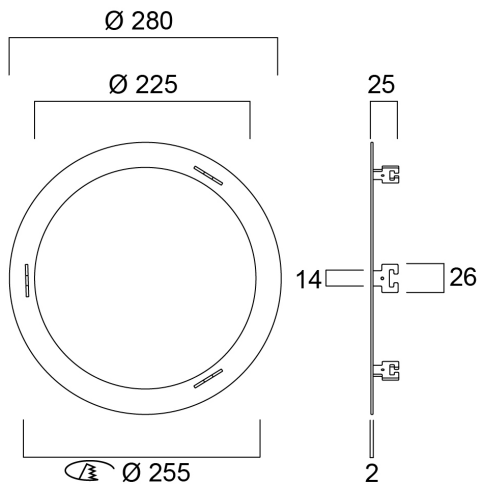

Data table

GENERAL DATA

Product name	Adapting Ring RAL9003 225/255/280
Technology	Accessory
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002556
E-number FI	4278415
Warranty	3 years

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02

Adapting Ring RAL9003 225/255/280 0030464

Cutout Dimensions (W x L in mm or Diameter in mm)	255
Weight (kg)	0.374

PACKAGING

Single packaging type	Plastic
Product EAN number	5410288304649
Packaging single length / height (cm)	29.7
Packaging single width (cm)	4.5
Packaging single depth (cm)	29.2
DUN14 (outer)	15410288304646
Units per outer package	20
Packaging outer length / height (cm)	61.0
Packaging outer width (cm)	24.5
Packaging outer depth (cm)	60.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No