

Features

• START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4800Lm; 43W; 112Lm/W; Drive current: 950mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Not compatible with surface mounting frames. SylSmart Standalone (SSC) enabled.


Product Overview

Product name	START Panel UGR19 600x600 4800Lm 840 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278374
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	43

START Panel UGR19 600x600 4800Lm 840 SSC
0042567


Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288425672
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

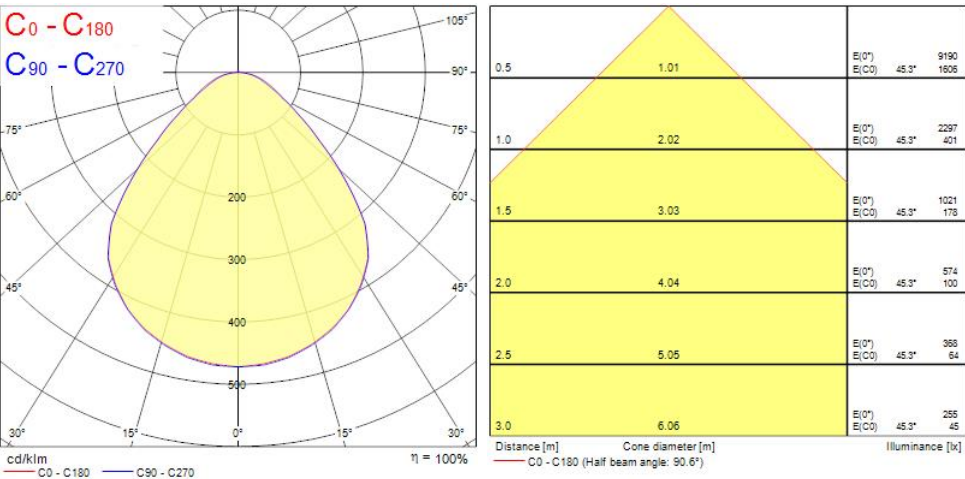

START Panel UGR19 600x600 4800Lm 840 SSC 0042567

Technical drawings

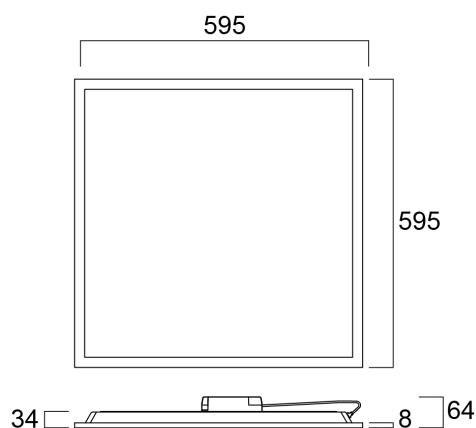

Data table

GENERAL DATA

Product name	START Panel UGR19 600x600 4800Lm 840 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278374
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000

START Panel UGR19 600x600 4800Lm 840 SSC 0042567

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	43
Mains voltage (V)	220-240V
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	5
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	950
Inrush Current (A)	23
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	23
Max. Luminaires per 13A C Breaker	31
Max. Luminaires per 16A C Breaker	38
Max. Luminaires per 20A C Breaker	48
Max. Luminaires per 10A B Breaker	14
Max. Luminaires per 13A B Breaker	19
Max. Luminaires per 16A B Breaker	23

START Panel UGR19 600x600 4800Lm 840 SSC 0042567

Max. Luminaires per 20A B Breaker	29
-----------------------------------	----

LIFETIME DATA

Lifespan L70 B50	100000
------------------	--------

Lifespan L80 B20	71000
------------------	-------

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
----------------	-------------------------

IP rating	IP40/20
-----------	---------

IK rating	IK03
-----------	------

Diffuser finish	Prismatic
-----------------	-----------

Diffuser material	Other
-------------------	-------

Nominal Product Length (mm)	595
-----------------------------	-----

Nominal Product Width (mm)	595
----------------------------	-----

Nominal Product Height (mm)	34
-----------------------------	----

Weight (kg)	1.8
-------------	-----

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288425672
--------------------	---------------

Packaging single length / height (cm)	60.0
---------------------------------------	------

Packaging single width (cm)	68.5
-----------------------------	------

Packaging single depth (cm)	3.8
-----------------------------	-----

DUN14 (inner)	25410288425676
---------------	----------------

Units per inner package	2
-------------------------	---

Packaging inner length / height (cm)	65.0
--------------------------------------	------

Packaging inner width (cm)	72.0
----------------------------	------

Packaging inner depth (cm)	10.6
----------------------------	------

DUN14 (outer)	15410288425679
---------------	----------------

Units per outer package	40
-------------------------	----

Packaging outer length / height (cm)	126.0
--------------------------------------	-------

Packaging outer width (cm)	72.0
----------------------------	------

Packaging outer depth (cm)	101.0
----------------------------	-------



START Panel UGR19 600x600 4800Lm 840 SSC
0042567

SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No