



Features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 330mm. Besa mounting box compatible, hole distance 51mm. DualTone functionality enables switch between 3000K and 4000K colour temperatures. Power 18W, output 1550 lumens (4000K). Supplied with integrated Microwave sensor for automatic on-off presence control. IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50.



Product Overview

Product name	START Surface IP44 1550lm MW 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Hospitality
ETIM Class	EC002892
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Colour temperature (K)	4000
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	High (>40%)

START Surface IP44 1550lm MW 830/840 DualTone 0043435

Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434353
Warranty	3 years
Dimming method	N/A

Photometry

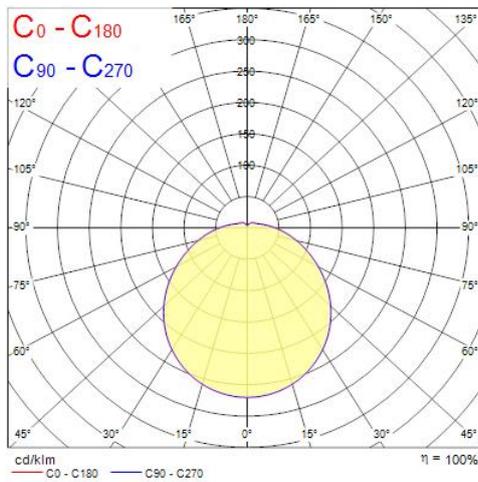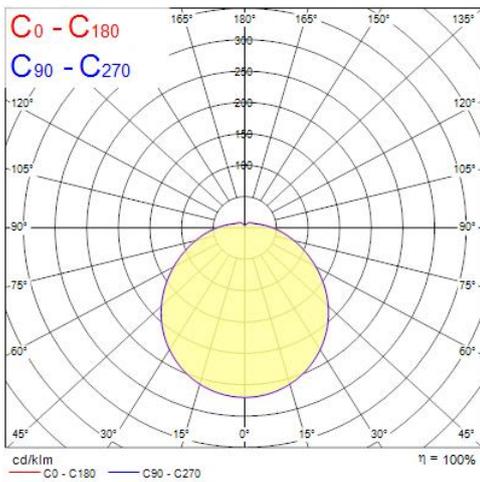


Distance [m]	Cone diameter [m]	E _v (0°)	E _v (C90)	E _v (C0)	Illuminance [lx]
0.5	1.67 1.69	1675	59.1° 114	59.4° 111	
1.0	3.34 3.38	419	59.1° 28	59.4° 28	
1.5	5.01 5.07	188	59.1° 13	59.4° 12	
2.0	6.68 6.76	105	59.1° 7	59.4° 7	
2.5	8.35 8.45	67	59.1° 5	59.4° 4	
3.0	10.03 10.15	47	59.1° 3	59.4° 3	

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 118.8°)
 — C90 - C270 (Half beam angle: 118.2°)

Distance [m]	Cone diameter [m]	E _v (0°)	E _v (C90)	E _v (C0)	Illuminance [lx]
0.5	1.67 1.69	1540	59.1° 108	59.4° 102	
1.0	3.34 3.38	385	59.1° 26	59.4° 26	
1.5	5.01 5.07	171	59.1° 12	59.4° 11	
2.0	6.68 6.76	96	59.1° 7	59.4° 6	
2.5	8.35 8.45	62	59.1° 4	59.4° 4	
3.0	10.03 10.15	43	59.1° 3	59.4° 3	

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 118.8°)
 — C90 - C270 (Half beam angle: 118.2°)

Technical drawings

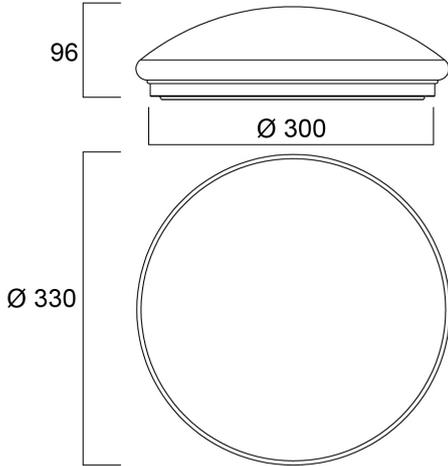

Data table

GENERAL DATA

Product name	START Surface IP44 1550lm MW 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Colour temperature (K)	4000

START Surface IP44 1550lm MW 830/840 DualTone 0043435

Correlated colour temperature range (K)	3000 - 4000
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Distribution type	Diffuse
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	18
Mains voltage (V)	220-240V
Lamp power factor	0.7
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	70
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	57
Inrush Current (A)	2
Inrush Duration (µs)	30
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	High (>40%)
Max. Luminaires per 10A C Breaker	15
Max. Luminaires per 13A C Breaker	20
Max. Luminaires per 16A C Breaker	24
Max. Luminaires per 20A C Breaker	30
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 13A B Breaker	20
Max. Luminaires per 16A B Breaker	24
Max. Luminaires per 20A B Breaker	30

START Surface IP44 1550lm MW 830/840 DualTone 0043435

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L90 B50	45000

PHYSICAL DATA

Housing colour	White
IP rating	IP44
IK rating	IK03
Diffuser finish	Opal
Diffuser material	Polypropylene
Nominal Product Height (mm)	96
Nominal Product Diameter (mm)	330
Weight (kg)	0.55

PACKAGING

Single packaging type	Carton
Product EAN number	5410288434353
Packaging single length / height (cm)	33.6
Packaging single width (cm)	9.9
Packaging single depth (cm)	33.5
DUN14 (outer)	15410288434350
Units per outer package	6
Packaging outer length / height (cm)	64.4
Packaging outer width (cm)	38.5
Packaging outer depth (cm)	38.2

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

START Surface IP44 1550lm MW 830/840 DualTone
0043435



Light your world