



Features

- A perfect choice for hospitality, decorative and mood lighting applications Unique and innovative lamp design and construction Low-lumen output to create the low-lit effect and gives no glare Low power construction: only 2.5W Perfect for SylPendant fixtures - a range of unique and elegant E27 lamp pendants, available in copper, brass, black and white finish Candlelight 2000K colour temperature creates a warm and cosy ambience High colour rendering – CRI80 High quality, scratch and temperature resistant golden tinted glass envelope 25,000 hours of average rated life. Last 25 times longer than incandescent lamps Omni-directional light distribution Non-dimmable More than 100,000X switching cycles 3 years warranty

Product Overview

Product name	ToLEDo Mirage G120 125LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
E-number FI	4740678
Luminous flux (lm)	125
Colour temperature (K)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	2.5
Product Voltage (V)	230

ToLEDo Mirage G120 125LM E27 SL
0029908

Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288299082
Warranty	3 years

Technical drawings



Data table

GENERAL DATA	
Product name	ToLEDo Mirage G120 125LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C

ToLEDo Mirage G120 125LM E27 SL 0029908

Performance ambient temperature Tq (°C)	25
---	----

ETIM Class	EC001959
------------	----------

E-number FI	4740678
-------------	---------

Warranty	3 years
----------	---------

OPTICAL DATA

Luminous flux (lm)	125
--------------------	-----

Luminous flux (Rated) (lm)	125
----------------------------	-----

Colour temperature (K)	2000
------------------------	------

Light colour	Candlelight
--------------	-------------

CRI (Ra)	80
----------	----

Colour Variation Initial (SDCM)	6
---------------------------------	---

Photobiological Risk Group	RG0
----------------------------	-----

Lumen maintenance at end of nominal life (%)	70
--	----

ELECTRICAL DATA

Wattage (W)	2.5
-------------	-----

Equivalent watt (W)	13
---------------------	----

Starting time (max) (s)	0.5
-------------------------	-----

Warm-up time to 60% of full light (max) (s)	1
---	---

Product Voltage (V)	230
---------------------	-----

Lamp power factor	0.5
-------------------	-----

Control gear required	No
-----------------------	----

No. Of switching cycles before premature failures	>100000
---	---------

Transformer required	No
----------------------	----

Dimmable	No
----------	----

Inrush Current (A)	0.2
--------------------	-----

Inrush Duration (µs)	8000
----------------------	------

Lamp Energy Label (class)	G
---------------------------	---

kWh per 1000 hours burning time	3
---------------------------------	---

ToLEDo Mirage G120 125LM E27 SL 0029908

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

LIFETIME DATA

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

PHYSICAL DATA

Nominal Product Length (mm)	165
Nominal Product Diameter (mm)	125
Weight (kg)	0.14

PACKAGING

Single packaging type	Carton
Product EAN number	5410288299082
Packaging single length / height (cm)	17.8
Packaging single width (cm)	13.2
Packaging single depth (cm)	13.2
DUN14 (outer)	15410288299089
Units per outer package	4
Packaging outer length / height (cm)	28.0
Packaging outer width (cm)	28.0
Packaging outer depth (cm)	20.5

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

Energy label



0029908




3
kWh/1000h



2019/2015



0029908

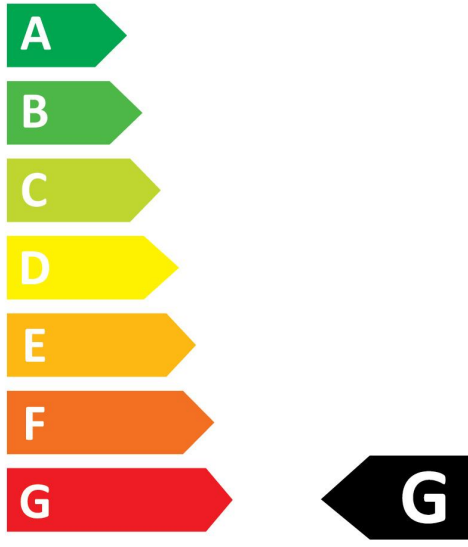

3
kWh/1000h



2019/2015