


**Insaver Slim 225 IP44 4100lm 840
0030309**

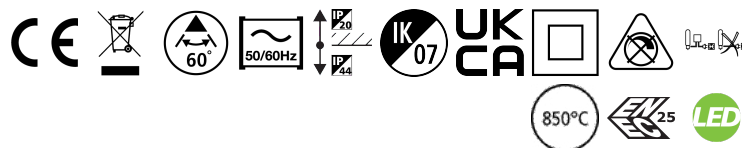

Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 33W; 4100lm; 124lm/W; 4000K; UGR <22 with shallow product depth 65mm. Meets TP(a) requirements.


Product Overview

Product name	Insaver Slim 225 IP44 4100lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4276923
Fixture luminous flux (lm)	4100
Luminaire efficacy (lm/W)	124
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	NA
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	33
Electrical protection	Class II

Insaver Slim 225 IP44 4100lm 840
0030309


Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303093
Warranty	5 years
Dimming method	N/A

Photometry

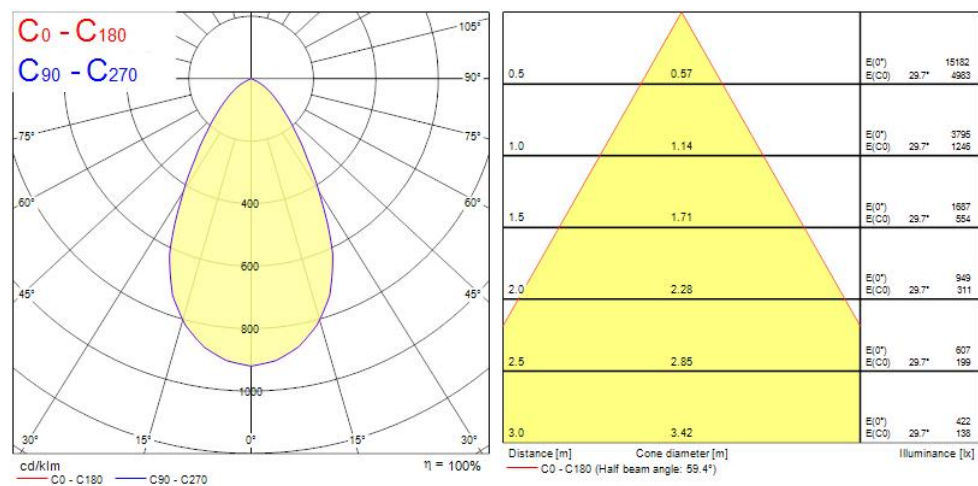

Insaver Slim 225 IP44 4100lm 840
0030309

Technical drawings

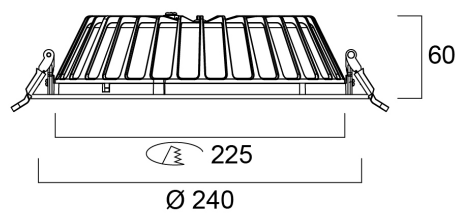

Data table

GENERAL DATA

Product name	Insaver Slim 225 IP44 4100lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4276923
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4100
Luminaire efficacy (lm/W)	124

Insaver Slim 225 IP44 4100lm 840 0030309

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	60
Beam Angle (°)	NA
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	33
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	750
Inrush Current (A)	5.36
Inrush Duration (μ s)	60
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	28
Max. Luminaires per 13A C Breaker	36
Max. Luminaires per 16A C Breaker	44

Insaver Slim 225 IP44 4100lm 840 0030309

Max. Luminaires per 20A C Breaker	56
Max. Luminaires per 10A B Breaker	16
Max. Luminaires per 13A B Breaker	21
Max. Luminaires per 16A B Breaker	26
Max. Luminaires per 20A B Breaker	33

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	39000

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Silver
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	240
Cutout Dimensions (W x L in mm or Diameter in mm)	225
Weight (kg)	0.83
Recessed Depth (mm)	150

PACKAGING

Single packaging type	Carton
Product EAN number	5410288303093
Packaging single length / height (cm)	25.5
Packaging single width (cm)	25.5
Packaging single depth (cm)	8.5
DUN14 (outer)	15410288303090
Units per outer package	12
Packaging outer length / height (cm)	52.5



Insaver Slim 225 IP44 4100lm 840
0030309

Packaging outer width (cm)	52.5
Packaging outer depth (cm)	27.5

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No