



Features

- Integrated LED highbay; Black aluminium housing; 25500Lm; 180 W; 142 Lm/W; 6500K; Drive current: 750mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 385 x 181 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.


Product Overview

Product name	Granit IP65 0-10V 26000lm 865 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357010
Fixture luminous flux (lm)	25500
Luminaire efficacy (lm/W)	142
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25


Granit IP65 0-10V 26000lm 865 WB 0039600

Photobiological Risk Group	RG1
Total power consumption (W)	180
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288396002
Warranty	5 years
Dimming method	0-10V

Photometry

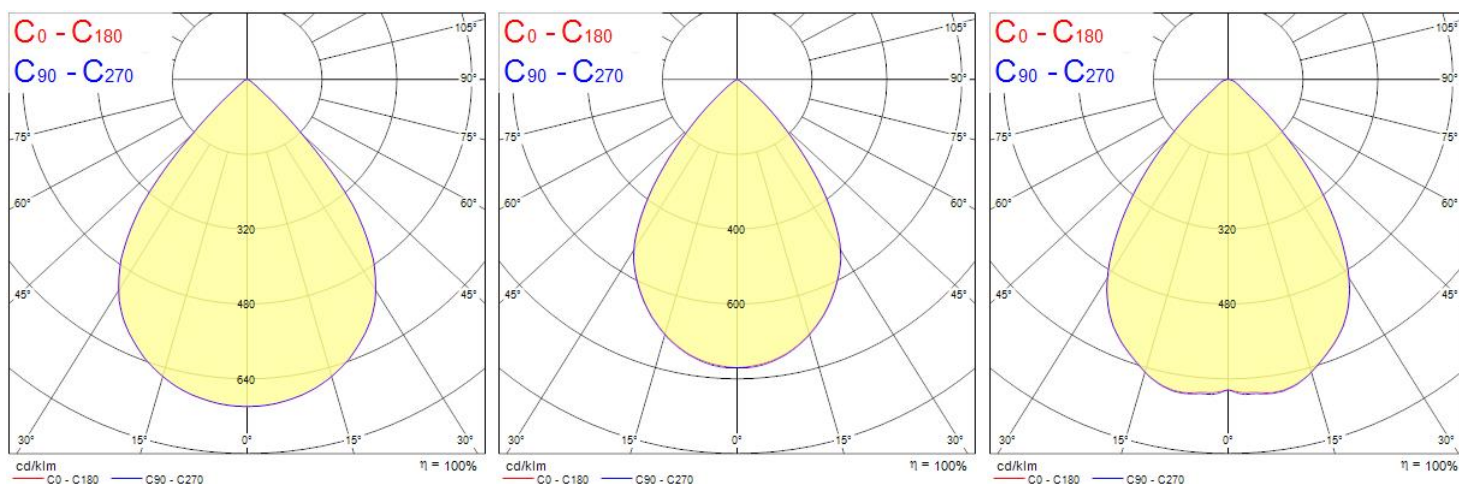

Granit IP65 0-10V 26000lm 865 WB
0039600

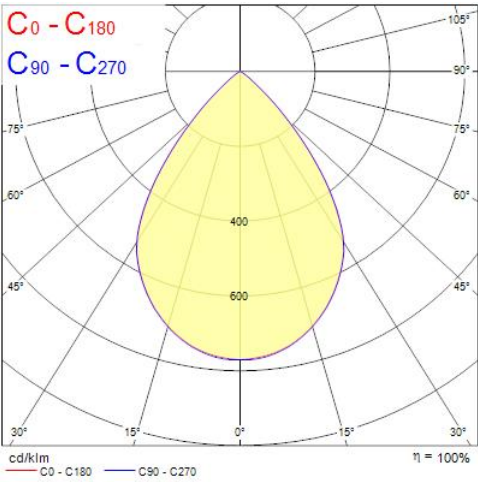

0.5	0.84	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	72144 16156
1.0	1.68	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	18036 4039
1.5	2.53	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	8016 1796
2.0	3.37	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	4509 1010
2.5	4.21	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	2886 646
3.0	5.05	E(0°) E(C0) E(C90)	40.1° 40.1° 40.1°	2004 449

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 80.2°) — C90 - C270 (Half beam angle: 80.2°)

0.5	0.76	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	76896 19320 19403
1.0	1.53	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	19224 4830 4861
1.5	2.29	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	8544 2147 2166
2.0	3.06	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	4806 1207 1213
2.5	3.82	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	3078 773 776
3.0	4.59	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	2136 537 539

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 74.6°) — C90 - C270 (Half beam angle: 74.8°)

0.5	0.76	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	76896 19320 19386
1.0	1.53	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	19209 4826 4847
1.5	2.29	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	8538 2146 2154
2.0	3.06	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	4802 1207 1212
2.5	3.82	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	3074 772 776
3.0	4.59	E(0°) E(C90) E(C0)	37.4° 37.4° 37.3°	2134 536 539

Distance [m] Cone diameter [m] Illuminance [lx]


— C0 - C180 (Half beam angle: 74.6°) — C90 - C270 (Half beam angle: 74.8°)

0.5	0.80	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	66279 16285 16135
1.0	1.60	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	16570 4071 4035
1.5	2.39	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	7364 1809 1790
2.0	3.19	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	4142 1016 1009
2.5	3.99	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	2851 661 646
3.0	4.79	E(0°) E(C90) E(C0)	38.6° 38.6° 38.7°	1941 482 448

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 77.4°) — C90 - C270 (Half beam angle: 77.2°)

Technical drawings

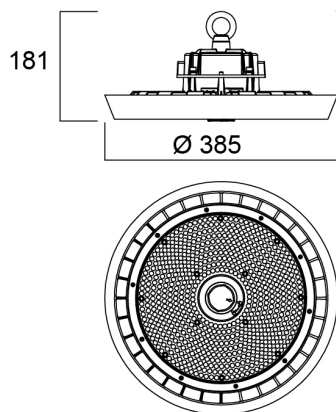

Data table

GENERAL DATA

Product name	Granit IP65 0-10V 26000lm 865 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4357010
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	25500
Luminaire efficacy (lm/W)	142

Granit IP65 0-10V 26000lm 865 WB 0039600

Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	180
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	Other
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	750
Inrush Current (A)	200
Inrush Duration (µs)	93
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	8
Max. Luminaires per 13A C Breaker	10
Max. Luminaires per 16A C Breaker	12
Max. Luminaires per 20A C Breaker	16
Max. Luminaires per 10A B Breaker	3
Max. Luminaires per 13A B Breaker	4
Max. Luminaires per 16A B Breaker	5
Max. Luminaires per 20A B Breaker	5

LIFETIME DATA

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

PHYSICAL DATA

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	181
Nominal Product Diameter (mm)	385
Weight (kg)	4.3

PACKAGING

Single packaging type	Carton
Product EAN number	5410288396002
Packaging single length / height (cm)	44.5
Packaging single width (cm)	44.5
Packaging single depth (cm)	19.5
DUN14 (outer)	05410288396002
Units per outer package	1
Packaging outer length / height (cm)	44.5
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	19.5

SAFETY DATA

Optimal operating condition (°C)	-30-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

Granit IP65 0-10V 26000lm 865 WB

0039600

Light your world