


START Panel UGR19 600x600 4800Lm 840 LILO
0042190

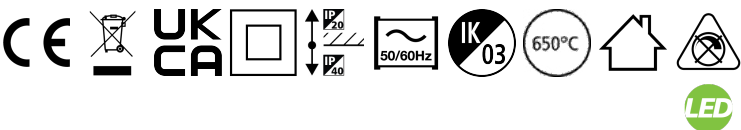

Features

• START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4800Lm; 43W; 112Lm/W; Drive current: 950mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation.


Product Overview

Product name	START Panel UGR19 600x600 4800Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278363
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	43
Electrical protection	Class II
Control gear type	LED driver constant current

START Panel UGR19 600x600 4800Lm 840 LILO
0042190


Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288421902
Warranty	5 years
Dimming method	N/A

Photometry

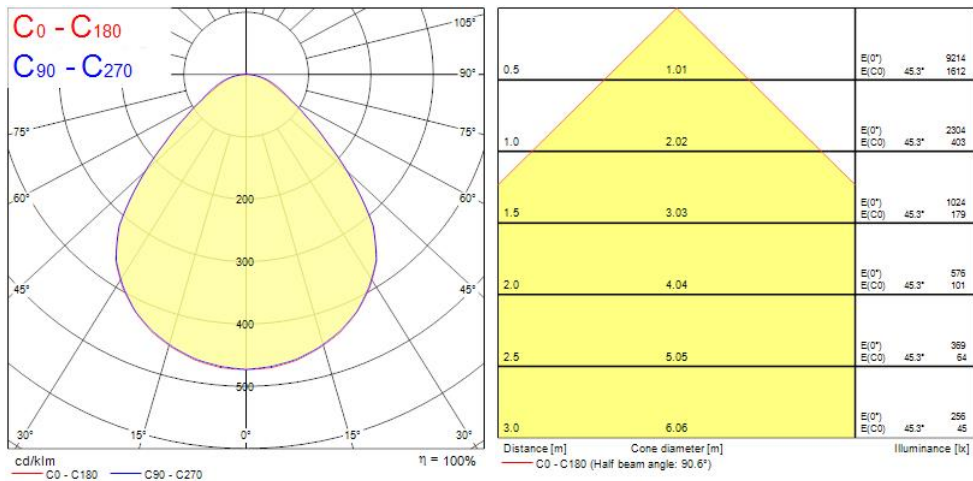

START Panel UGR19 600x600 4800Lm 840 LILO 0042190

Technical drawings

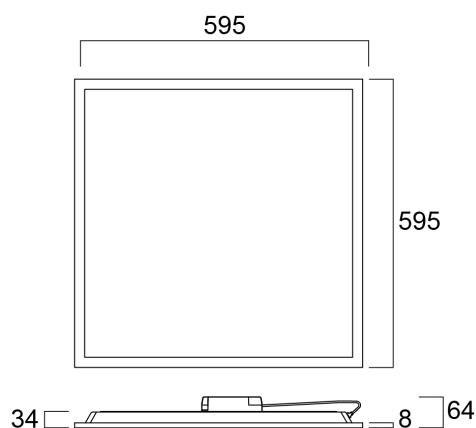

Data table

GENERAL DATA

Product name	START Panel UGR19 600x600 4800Lm 840 LILO
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278363
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Colour temperature (K)	4000

START Panel UGR19 600x600 4800Lm 840 LILO 0042190

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	43
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	950
Inrush Current (A)	20
Inrush Duration (μ s)	260
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	29
Max. Luminaires per 13A C Breaker	39
Max. Luminaires per 16A C Breaker	48
Max. Luminaires per 20A C Breaker	61
Max. Luminaires per 10A B Breaker	16
Max. Luminaires per 13A B Breaker	22
Max. Luminaires per 16A B Breaker	28
Max. Luminaires per 20A B Breaker	35

START Panel UGR19 600x600 4800Lm 840 LILO 0042190

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	71000

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	34
Weight (kg)	2.134

PACKAGING

Single packaging type	Carton
Product EAN number	5410288421902
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.8
Packaging single depth (cm)	64.5
DUN14 (outer)	15410288421909
Units per outer package	4
Packaging outer length / height (cm)	69.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

START Panel UGR19 600x600 4800Lm 840 LILO
0042190

Light your world