


START Downlight 205 IP44 DALI 2000Lm 840
0030337



Features

• Ceiling recessed LED downlight IP44 (from the front), with only 60mm product depth and 205mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (28000671). Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2000LM, 20W, 100lm/W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V. Meets TP(a) requirements.


Product Overview

Product name	START Downlight 205 IP44 DALI 2000Lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278165
Fixture luminous flux (lm)	2000
Luminous flux (lm)	2000
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	20

**START Downlight 205 IP44 DALI 2000Lm 840
0030337**


Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303376
Warranty	5 years
Dimming method	DALI

Photometry

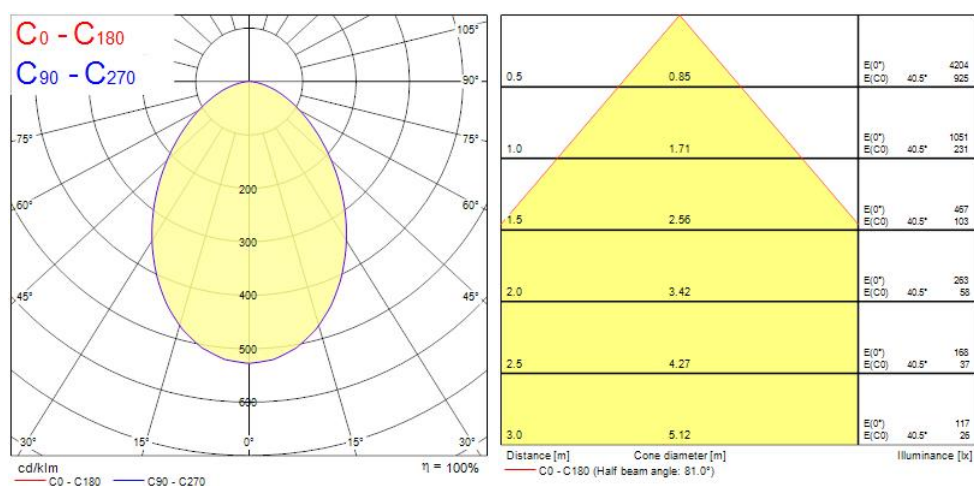

START Downlight 205 IP44 DALI 2000Lm 840
0030337

Technical drawings

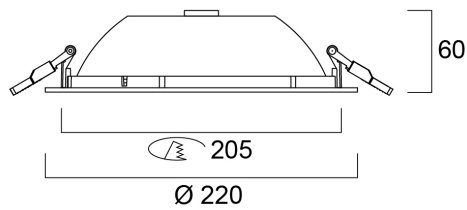

Data table

GENERAL DATA

Product name	START Downlight 205 IP44 DALI 2000Lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278165
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2000
Luminous flux (lm)	2000

START Downlight 205 IP44 DALI 2000Lm 840 0030337

Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	80
Distribution type	Symmetric
Glare control	< 26
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	20
Mains voltage (V)	220-240V
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	600
Inrush Current (A)	25
Inrush Duration (µs)	140
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	31

START Downlight 205 IP44 DALI 2000Lm 840 0030337

Max. Luminaires per 13A C Breaker	40
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	66
Max. Luminaires per 10A B Breaker	19
Max. Luminaires per 13A B Breaker	24
Max. Luminaires per 16A B Breaker	31
Max. Luminaires per 20A B Breaker	40

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	220
Cutout Dimensions (W x L in mm or Diameter in mm)	205
Weight (kg)	0.51
Recessed Depth (mm)	60

PACKAGING

Single packaging type	Carton
Product EAN number	5410288303376
Packaging single length / height (cm)	23.5
Packaging single width (cm)	23.3
Packaging single depth (cm)	9.5
DUN14 (outer)	15410288303373



START Downlight 205 IP44 DALI 2000Lm 840
0030337

Units per outer package	12
Packaging outer length / height (cm)	48.9
Packaging outer width (cm)	49.0
Packaging outer depth (cm)	31.3

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No