



Features

- ToLEDo R7s is a retrofit replacement for traditional halogen double-ended linear R7s lamps. The slim design and glass construction give the same look and feel of traditional halogen R7s lamp. Omni-directional light distribution. High lumen efficacy. Lumen output: 850lm. 85% energy saving. Length: 118mm. Non-Dimmable. 15,000 hours average rated life. Ideal for domestic and commercial applications.



Product Overview

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Product name                    | ToLEDo Retro R7s 118MM 850LM 827 SL |
| Technology                      | LED                                 |
| Watt (Rated) (W)                | 7.7                                 |
| Type                            | LED exchangeable                    |
| Cap/Base                        | R7s                                 |
| Fixture rating                  | Open                                |
| General application             | Hospitality, Residential & Consumer |
| ETIM Class                      | EC001959                            |
| E-number FI                     | 4741121                             |
| Luminous flux (lm)              | 850                                 |
| Colour temperature (K)          | 2700                                |
| Light colour                    | Homelight                           |
| CRI (Ra)                        | 80                                  |
| Colour Variation Initial (SDCM) | 6                                   |
| Photobiological Risk Group      | RG1                                 |
| Wattage (W)                     | 7.7                                 |
| Product Voltage (V)             | 230                                 |
| Dimmable                        | No                                  |

ToLEDo Retro R7s 118MM 850LM 827 SL  
0029684

|                            |               |
|----------------------------|---------------|
| Average life (Nominal) (h) | 15000         |
| Product EAN number         | 5410288296845 |
| Warranty                   | 3 years       |

Technical drawings

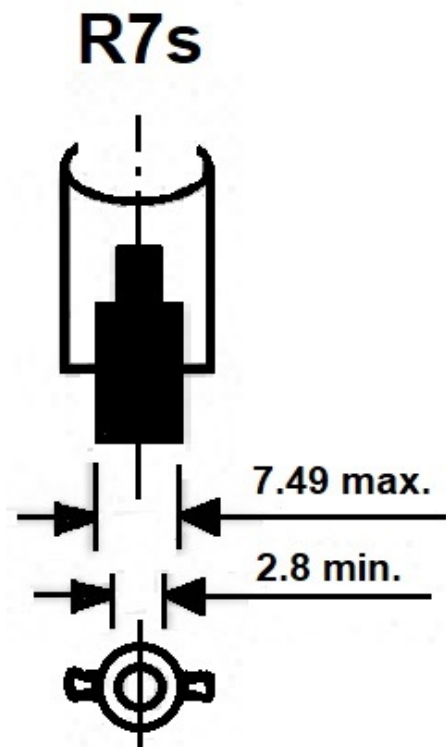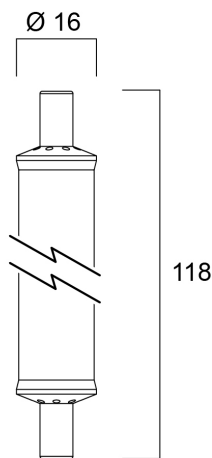

Data table

| GENERAL DATA     |                                     |
|------------------|-------------------------------------|
| Product name     | ToLEDo Retro R7s 118MM 850LM 827 SL |
| Technology       | LED                                 |
| Watt (Rated) (W) | 7.7                                 |
| Type             | LED exchangeable                    |
| Cap/Base         | R7s                                 |
| Fixture rating   | Open                                |

## ToLEDo Retro R7s 118MM 850LM 827 SL 0029684

|                                         |                                     |
|-----------------------------------------|-------------------------------------|
| General application                     | Hospitality, Residential & Consumer |
| Operating temperature range (°C)        | -20°C...+45°C                       |
| Performance ambient temperature Tq (°C) | 25                                  |
| ETIM Class                              | EC001959                            |
| E-number FI                             | 4741121                             |
| Warranty                                | 3 years                             |

### OPTICAL DATA

|                                              |           |
|----------------------------------------------|-----------|
| Luminous flux (lm)                           | 850       |
| Luminous flux (Rated) (lm)                   | 850       |
| Colour temperature (K)                       | 2700      |
| Light colour                                 | Homelight |
| CRI (Ra)                                     | 80        |
| Colour Variation Initial (SDCM)              | 6         |
| Photobiological Risk Group                   | RG1       |
| Lumen maintenance at end of nominal life (%) | 70        |

### ELECTRICAL DATA

|                                                   |         |
|---------------------------------------------------|---------|
| Wattage (W)                                       | 7.7     |
| Equivalent watt (W)                               | 60      |
| Product Voltage (V)                               | 230     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >50000  |
| Transformer required                              | No      |
| Dimmable                                          | No      |
| Inrush Current (A)                                | 1.2     |
| Inrush Duration (µs)                              | 520     |
| Lamp Energy Label (class)                         | E       |
| Nominal Frequency (Hz)                            | 50/60Hz |
| Max. Luminaires per 16A C Breaker                 | 133     |
| Max. Luminaires per 16A B Breaker                 | 66      |

## ToLEDo Retro R7s 118MM 850LM 827 SL 0029684

### LIFETIME DATA

|                            |       |
|----------------------------|-------|
| Lifespan L70 B50           | 15000 |
| Average life (Nominal) (h) | 15000 |
| Average life (Rated) (h)   | 15000 |

### PHYSICAL DATA

|                               |       |
|-------------------------------|-------|
| Nominal Product Length (mm)   | 118   |
| Nominal Product Diameter (mm) | 17    |
| Weight (kg)                   | 0.013 |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288296845  |
| Packaging single length / height (cm) | 12.0           |
| Packaging single width (cm)           | 4.5            |
| Packaging single depth (cm)           | 4.5            |
| DUN14 (outer)                         | 15410288296842 |
| Units per outer package               | 6              |
| Packaging outer length / height (cm)  | 14.3           |
| Packaging outer width (cm)            | 9.7            |
| Packaging outer depth (cm)            | 13.0           |

### SAFETY DATA


|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| Optimal operating condition (°C)    | -20-45                                     |
| Breakage cleaning instructions      | Not applicable                             |
| Special purpose lamp                | No                                         |
| Dry applications use only           | Yes                                        |
| Suitable for household illumination | Yes                                        |
| Safety message                      | Not Suitable for totally enclosed fixtures |

ToLEDo Retro R7s 118MM 850LM 827 SL  
0029684

Energy label



0029684

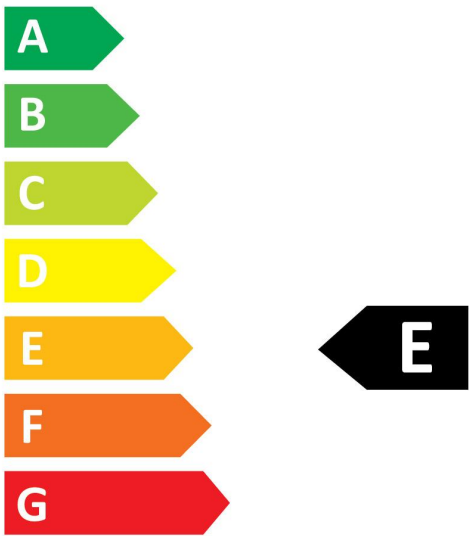


8  
kWh/1000h



2019/2015



0029684

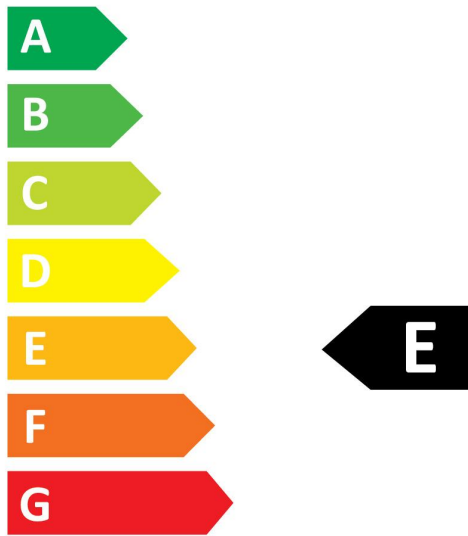

8  
kWh/1000h



2019/2015