

START PANEL IP54 U19 600 4300LM 840 DALI 0047787



Features

- START Panel IP54 is a range of recessed integrated LED panels for general indoor lighting applications such as breakout areas, offices and meeting rooms. Max. drive current: 165mA; Max. power: 35W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Efficacy up to: 127Lm/W; Fixture lumen up to: 4450lm; Glare control <19; IK03; IP54 (from the front); Class II; DALI dimmable.


Product Overview

Product name	START PANEL IP54 U19 600 4300LM 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4274205
Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes


START PANEL IP54 U19 600 4300LM 840 DALI
0047787

Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Product EAN number	5410288477879
Warranty	5 years
Dimming method	DALI

Photometry

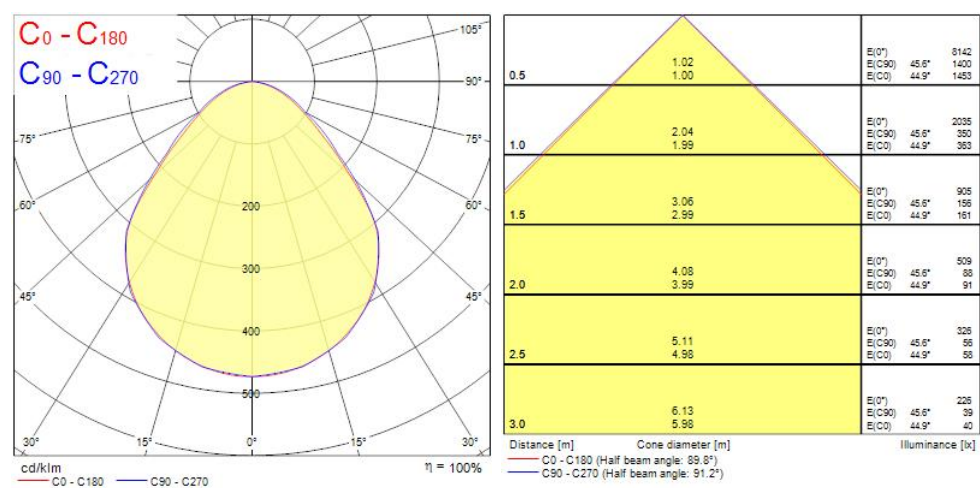

Technical drawings

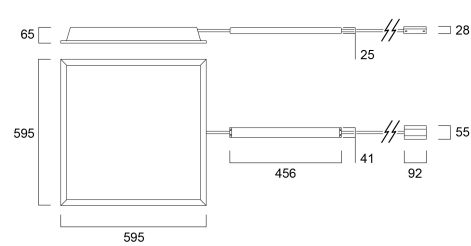

Data table

START PANEL IP54 U19 600 4300LM 840 DALI 0047787

GENERAL DATA

Product name	START PANEL IP54 U19 600 4300LM 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274205
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	16.0
Electrical protection	Class I

START PANEL IP54 U19 600 4300LM 840 DALI 0047787

Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	150
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	48
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	75
Max. Luminaires per 16A B Breaker	21

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	71000

PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595

START PANEL IP54 U19 600 4300LM 840 DALI 0047787

Nominal Product Height (mm)	65
Weight (kg)	3.168

PACKAGING

Single packaging type	Carton
Product EAN number	5410288477879
Packaging single length / height (cm)	61.0
Packaging single width (cm)	7.0
Packaging single depth (cm)	61.0
DUN14 (outer)	05410288477879
Units per outer package	4
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	32.6
Packaging outer depth (cm)	64.5

SAFETY DATA

Optimal operating condition (°C)	-10-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No