

SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722



Features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1578 mm x W 84 mm x H 75 mm size, Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 4800 lm, 33 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK08, IP65.


Product Overview

Product name	SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	220
Luminous flux (emergency) (lm)	220
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No

SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722


Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487229
Warranty	5 years
Dimming method	N/A

Photometry

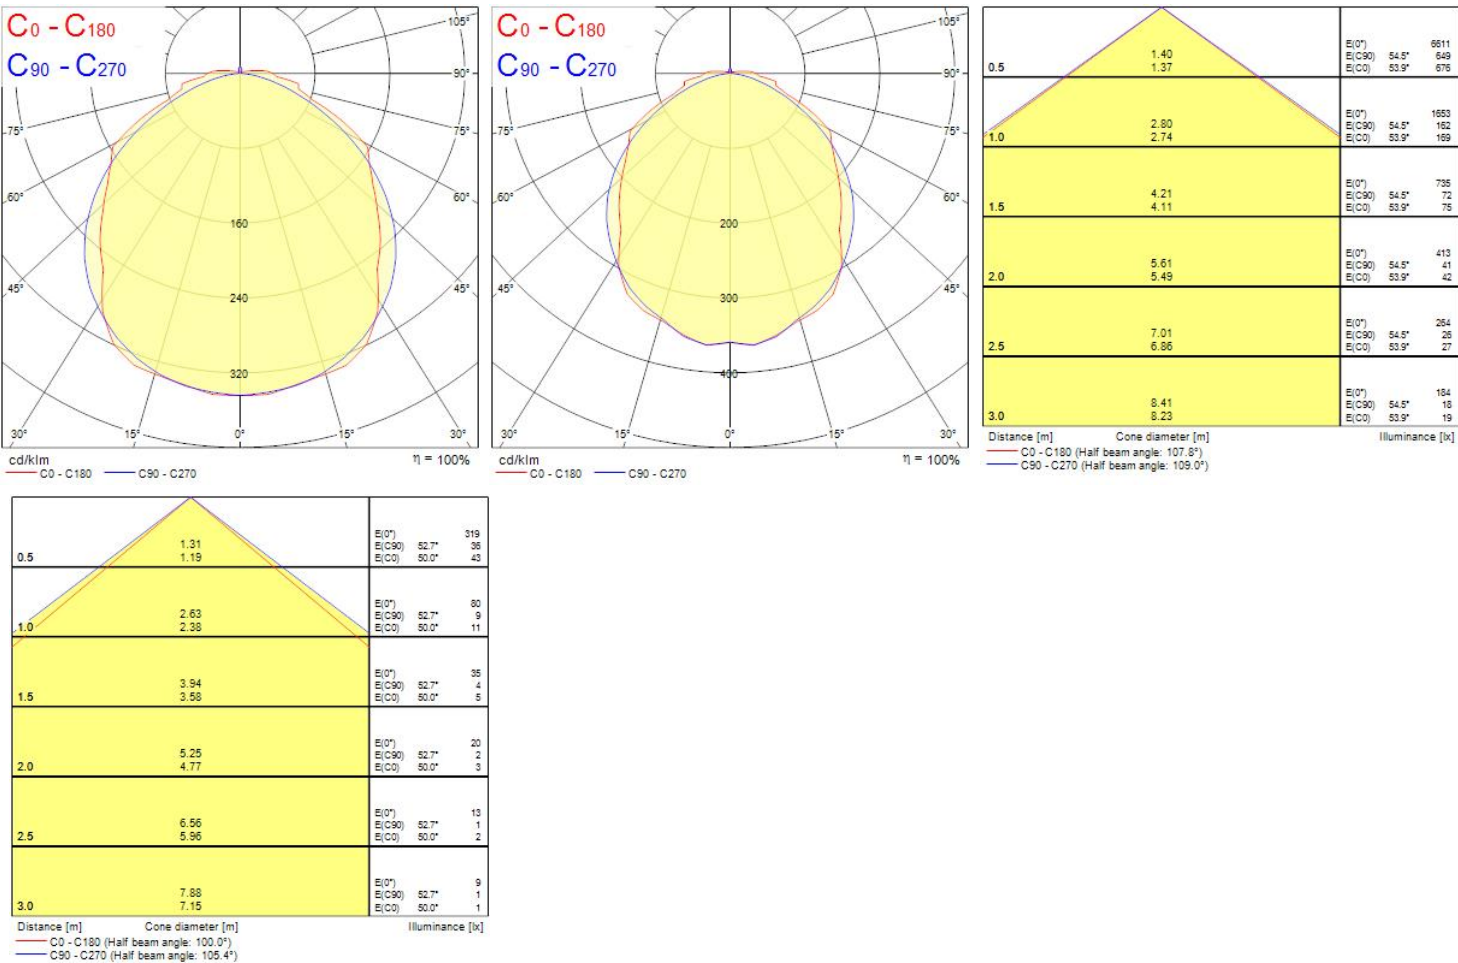

SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722

Technical drawings



Data table

GENERAL DATA

Product name	SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+30°C
ETIM Class	EC000109
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	220
Luminous flux (emergency) (lm)	220

SYLPROOF SUPERIA LED G3 1500mm Single 4K E3 0048722

Emergency duration (h)	3
------------------------	---

ELECTRICAL DATA

Total power consumption (W)	33
-----------------------------	----

Mains voltage (V)	220-240V
-------------------	----------

Electrical protection	Class I
-----------------------	---------

Control gear required	No
-----------------------	----

Control gear type	Electronic ballast
-------------------	--------------------

Dimmable	No
----------	----

Dimming method	N/A
----------------	-----

Drive current (mA)	300
--------------------	-----

Nominal Frequency (Hz)	50/60Hz
------------------------	---------

LIFETIME DATA

Lifespan L70 B50	60000
------------------	-------

Lifespan L80 B10	60000
------------------	-------

Lifespan L90 B50	60000
------------------	-------

PHYSICAL DATA

Housing colour	Grey
----------------	------

IP rating	IP65
-----------	------

IK rating	IK08
-----------	------

Diffuser finish	Transparent
-----------------	-------------

Diffuser material	PC Polycarbonate
-------------------	------------------

Nominal Product Length (mm)	1578
-----------------------------	------

Nominal Product Width (mm)	84
----------------------------	----

Nominal Product Height (mm)	75
-----------------------------	----

Weight (kg)	2.26
-------------	------

PACKAGING

Single packaging type	Carton
-----------------------	--------

Product EAN number	5410288487229
--------------------	---------------

Packaging single length / height (cm)	167.2
---------------------------------------	-------



SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722

Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487229
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No