

## SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3) 0045172



### Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP3 = 3 core), sheet steel, 2812LM, 26W, 108lm/W, 4000K, drive current: 350mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), IP20, IK07, 50,000 hrs (L70), (LxWxH) 1205x66x76mm, 5 step MacAdam ellipse, 3kg, white RAL9016, Class 1, 220-240V, energy class: A++, A+, A.




### Product Overview

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4274239
E-number SE	7213390
Fixture luminous flux (lm)	2812
Luminaire efficacy (lm/W)	108.15
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	138
Glare control	< 29
Photobiological Risk Group	RG0


## SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3) 0045172

Total power consumption (W)	26
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288451725
Warranty	5 years
Dimming method	N/A

### Photometry

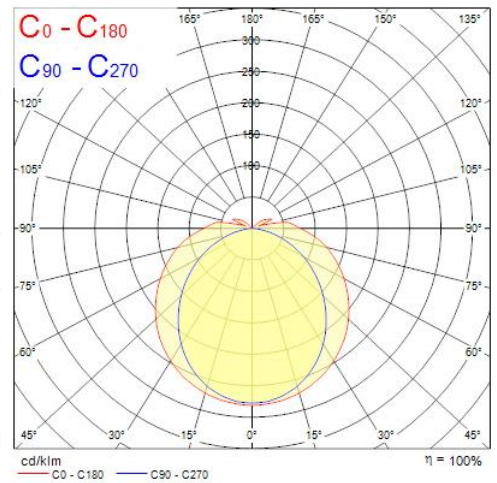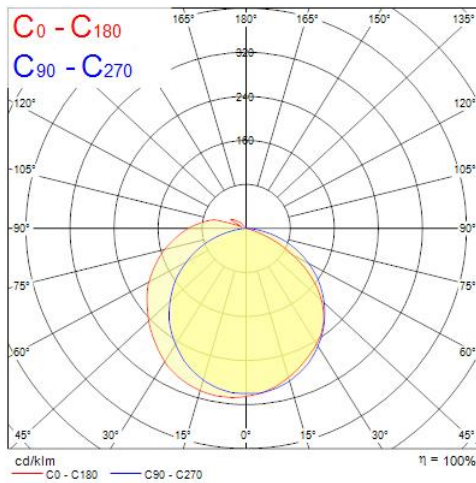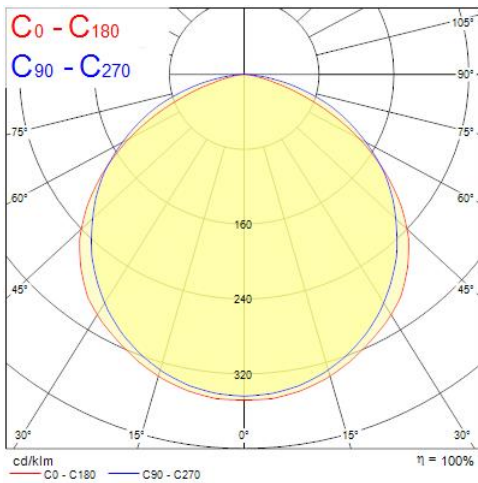


## SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3) 0045172

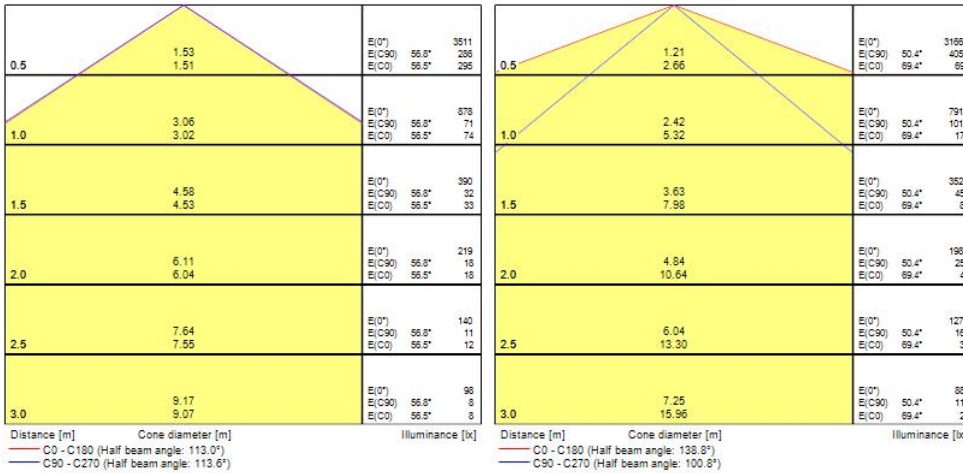

### Technical drawings



Version	L	H	W
600mm	605	76	66
1200mm	1205	76	66
1500mm	1505	76	66
1200mm PIR	1305	76	66
1500mm PIR	1605	76	66



Version	L	H1	W1
600mm	605	90	120
1200mm	1205	90	120
1500mm	1505	90	120
1200mm PIR	1305	90	120
1500mm PIR	1605	90	120

### Data table

#### GENERAL DATA

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3)
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+25°C

## SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3) 0045172

Performance ambient temperature Tq  
(°C) 25

ETIM Class EC000109

E-number FI 4274239

E-number SE 7213390

Warranty 5 years

### OPTICAL DATA

Fixture luminous flux (lm) 2812

Luminaire efficacy (lm/W) 108.15

LOR (%) 100

Colour temperature (K) 4000

Light colour Neutral White

CRI (Ra) 80

Colour Consistency (SDCM) 5

Colour Variation Initial (SDCM) 5

Adjustable chromaticity N

Beam Angle (°) 138

Distribution type Symmetric

Glare control < 29

Photobiological Risk Group RG0

### ELECTRICAL DATA

Total power consumption (W) 26

Mains voltage (V) 220-240V

Lamp power factor 0.95

THD (at 230 V, 50 Hz, full load, at 100%  
dimming level)  $\leq$  xx.x % 10

Electrical protection Class I

Control gear required No

Control gear type Electronic ballast

Control gear mounting Built-in

Transformer required Yes

Dimmable No

## SYLBATTEN LED 1205MM 3000LM 4000K EB (TP3) 0045172

Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	32
Max. Luminaires per 13A C Breaker	42
Max. Luminaires per 16A C Breaker	53
Max. Luminaires per 20A C Breaker	66

### LIFETIME DATA

Lifespan L70 B50	50000
Lifespan L70 B20	30000
Lifespan L70 B10	15000
Lifespan L80 B50	30000
Lifespan L80 B20	30000
Lifespan L80 B10	15000
Lifespan L90 B50	15000
Lifespan L90 B20	15000
Lifespan L90 B10	15000

### PHYSICAL DATA

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1205
Nominal Product Width (mm)	66
Nominal Product Height (mm)	76
Weight (kg)	2.546

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288451725
Packaging single length / height (cm)	124.2
Packaging single width (cm)	8.1
Packaging single depth (cm)	9.2
DUN14 (outer)	05410288451725
Units per outer package	1
Packaging outer length / height (cm)	124.2
Packaging outer width (cm)	8.1
Packaging outer depth (cm)	9.2

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No