



Features


- The standard, non- Auto test emergency kit enables conversion of general lighting for emergency operation and is a good solution for applications where self-testing is not required or suitable. It is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Product Overview

Product name	EMERGENCY PACK MANUAL TESTING 6V-55V
Technology	Accessory
General application	Education, Hospitality, Office, Retail
ETIM Class	EC000471
E-number FI	4278349
Product EAN number	5410288466002
Warranty	1 year

EMERGENCY PACK MANUAL TESTING 6V-55V
0046600

Technical drawings

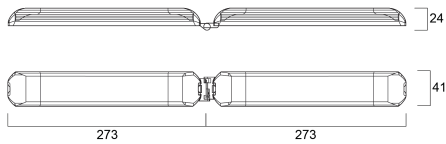

Data table

GENERAL DATA

Product name	EMERGENCY PACK MANUAL TESTING 6V-55V
Technology	Accessory
General application	Education, Hospitality, Office, Retail
ETIM Class	EC000471
E-number FI	4278349
Warranty	1 year

ELECTRICAL DATA

Control gear required	No
-----------------------	----

PHYSICAL DATA

Weight (kg)	0.47
-------------	------

PACKAGING

Single packaging type	Carton
Product EAN number	5410288466002
Packaging single length / height (cm)	28.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	4.5
Units per inner package	1



EMERGENCY PACK MANUAL TESTING 6V-55V
0046600

DUN14 (outer)	05410288466002
Units per outer package	25
Packaging outer length / height (cm)	46.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	30.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No