

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
0052417



Features

• Ceiling Recessed LED Linear luminaire (lay-in), with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 595x595x60mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x285mm, 1-10V Dimmable, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 40W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Glow Wire Test 850°C, Quick and easy electrical connection with direct access to push-connectors on top, 2 x metallic safety cables (1.5m) included, the luminaire can be covered with building insulation of Glass Wool type.


Product Overview

Product name	RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4273779
Fixture luminous flux (lm)	4500
Luminous flux (lm)	4500
Luminaire efficacy (lm/W)	113
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
0052417


Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Minimum dimming level (%)	10
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288524177
Warranty	5 years
Dimming method	1-10V (Analogue)

Photometry

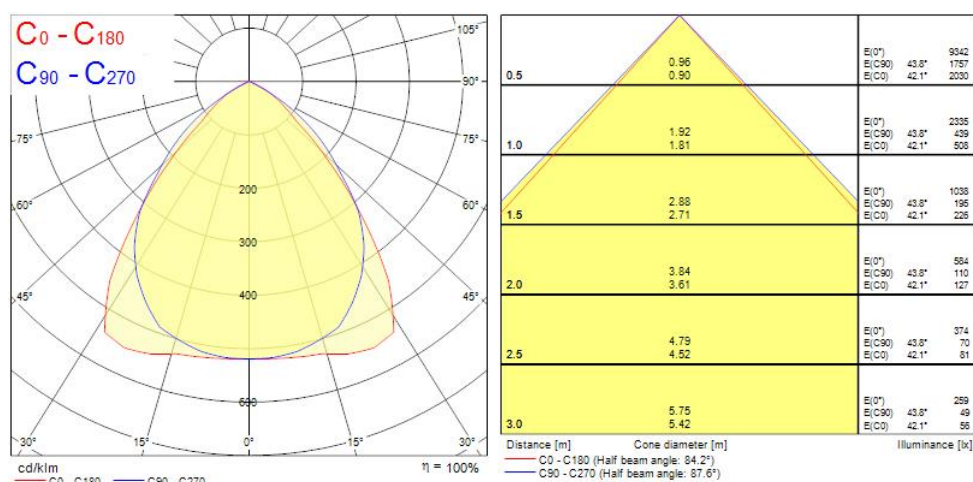

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
0052417

Technical drawings

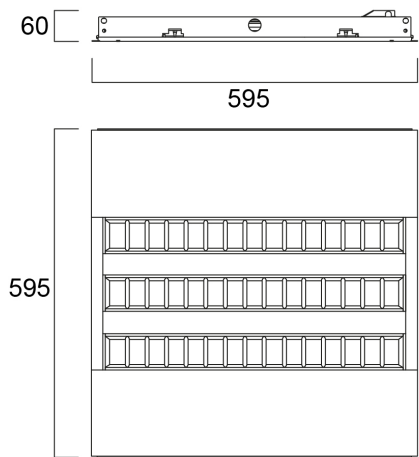

Data table

GENERAL DATA

Product name	RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4273779
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4500
Luminous flux (lm)	4500
Luminaire efficacy (lm/W)	113

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2 0052417

Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	40
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	Other
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	10
Drive current (mA)	275
Inrush Current (A)	45
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	62
Max. Luminaires per 10A B Breaker	18
Max. Luminaires per 16A B Breaker	30
Max. Luminaires per 20A B Breaker	37

LIFETIME DATA

Lifespan L70 B50	50000
Lifespan L70 B10	50000

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2 0052417

Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	60
Weight (kg)	4.1
Recessed Depth (mm)	120

PACKAGING

Single packaging type	Carton
Product EAN number	5410288524177
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288524177
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

SYLVANIA

RANA LED R 600 HO 4K LOUV+PRI 1-10 W GEN2
0052417

Light your world