


SylWork Flood 2000LM 840 IP65  
0090004

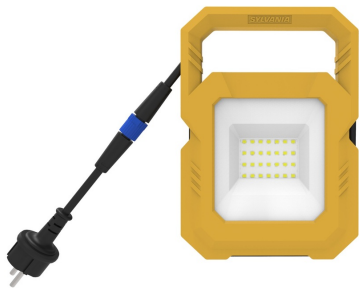

Features

- Slim LED portable work light
- Lightweight, slim, stylish robust, high-quality plastic body
- Stable, flexible positioning with stand or Tripod
- Housing material: PC housing, glass lens and metal bracket
- Option to use 2 work lights in the same time installed on the same Tripod
- Mains operated version
- Space-saving design – Tripod version can be folded up and stowed away
- 4000K Cool White light
- Total system efficacy up to 100lm/W
- CRI >80
- Operating temperature range: -20 to +40°C
- Lifetime: 30.000 hrs (L70/B50)
- 3 year warranty

Product Overview

|                            |                               |
|----------------------------|-------------------------------|
| Product name               | SylWork Flood 2000LM 840 IP65 |
| Technology                 | LED                           |
| Light source included      | Fixture without Lightsource   |
| General application        | Residential & Consumer        |
| ETIM Class                 | EC000346                      |
| Light colour               | Cool White                    |
| Photobiological Risk Group | RG1                           |
| Electrical protection      | Class I                       |
| Dimmable                   | Yes                           |
| IP rating                  | IP65                          |
| IK rating                  | IK07                          |
| Product EAN number         | 5410288900049                 |
| Warranty                   | 3 years                       |
| Dimming method             | Onboard pot                   |

Data table

GENERAL DATA

|                     |                               |
|---------------------|-------------------------------|
| Product name        | SylWork Flood 2000LM 840 IP65 |
| Technology          | LED                           |
| General application | Residential & Consumer        |

## SylWork Flood 2000LM 840 IP65 0090004

|            |          |
|------------|----------|
| ETIM Class | EC000346 |
| Warranty   | 3 years  |

### OPTICAL DATA

|                            |            |
|----------------------------|------------|
| Light colour               | Cool White |
| Photobiological Risk Group | RG1        |

### ELECTRICAL DATA

|                        |                             |
|------------------------|-----------------------------|
| Light source included  | Fixture without Lightsource |
| Mains voltage (V)      | 220-240V                    |
| Electrical protection  | Class I                     |
| Control gear required  | No                          |
| Dimmable               | Yes                         |
| Dimming method         | Onboard pot                 |
| Nominal Frequency (Hz) | 50Hz                        |

### PHYSICAL DATA

|                             |      |
|-----------------------------|------|
| IP rating                   | IP65 |
| IK rating                   | IK07 |
| Nominal Product Length (mm) | 230  |
| Nominal Product Width (mm)  | 163  |
| Nominal Product Height (mm) | 43   |
| Weight (kg)                 | 0.95 |

### PACKAGING

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288900049  |
| Packaging single length / height (cm) | 25.5           |
| Packaging single width (cm)           | 18.8           |
| Packaging single depth (cm)           | 6.2            |
| DUN14 (outer)                         | 15410288900046 |
| Units per outer package               | 8              |
| Packaging outer length / height (cm)  | 39.0           |



SylWork Flood 2000LM 840 IP65  
0090004

|                            |      |
|----------------------------|------|
| Packaging outer width (cm) | 26.5 |
| Packaging outer depth (cm) | 27.5 |

SAFETY DATA

|                                     |    |
|-------------------------------------|----|
| Special purpose lamp                | No |
| Dry applications use only           | No |
| Suitable for household illumination | No |