

Insaver Slim UGR19 IP65 150 1200lm 840  
0030529



Features

• Insaver Slim is a ceiling recessed LED downlight (IP65 from the front and back), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. IK07 for the fixture, IK03 for the IP driver box. When using with EM kit (0046600& 0046601), protection IP65 kept only from the front. Meets TP(a) requirements.


Product Overview

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | Insaver Slim UGR19 IP65 150 1200lm 840 |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Aluminium                              |
| Mount                           | Ceiling recessed mounting              |
| General application             | Hospitality, Office, Retail            |
| ETIM Class                      | EC001744                               |
| E-number FI                     | 4579607                                |
| Fixture luminous flux (lm)      | 1200                                   |
| Luminaire efficacy (lm/W)       | 126                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | 3                                      |
| Beam Angle (°)                  | 70                                     |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG1                                    |
| Total power consumption (W)     | 9.5                                    |
| Electrical protection           | Class II                               |
| Control gear type               | LED driver constant current            |
| Dimmable                        | No                                     |

Insaver Slim UGR19 IP65 150 1200lm 840  
0030529

|                     |                         |
|---------------------|-------------------------|
| LED Flickering Rate | Ultra low (5% or less)  |
| Housing colour      | RAL 9003 - Signal white |
| IP rating           | IP65                    |
| IK rating           | IK03                    |
| Product EAN number  | 5410288305295           |
| Warranty            | 5 years                 |
| Dimming method      | N/A                     |

Photometry

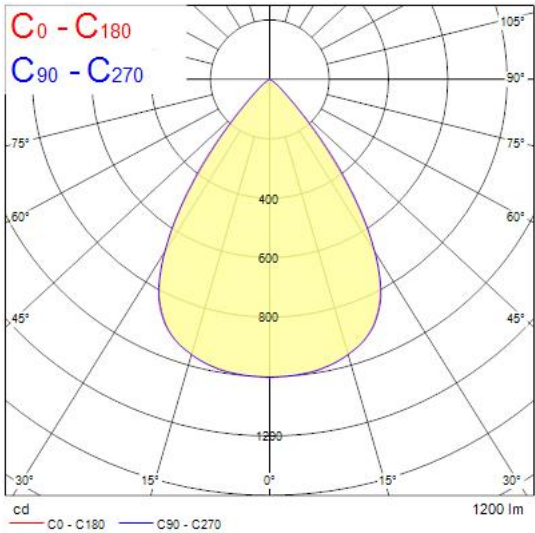

Technical drawings

