

Features

- Integrated LED highbay; Black aluminium housing; 19500 Lm; 139 W; 140 Lm/W; 4000K; Drive current: 2400mA; CRI 80; 55° beam angle; DALI dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 321 x 189 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.


Product Overview

Product name	Granit IP65 DALI 19000lm 840 MB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357015
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	55
Glare control	< 22

Granit IP65 DALI 19000lm 840 MB 0039618

Photobiological Risk Group	RG1
Total power consumption (W)	139
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288396187
Warranty	5 years
Dimming method	DALI

Photometry

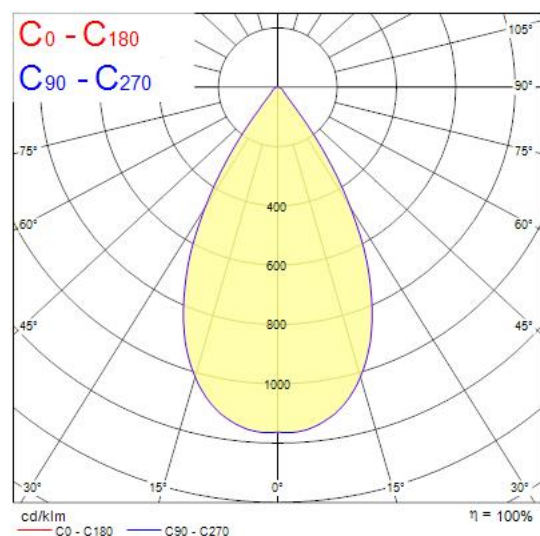

Technical drawings

