


START Downlight 5in1 65-260 1800LM  
0053150

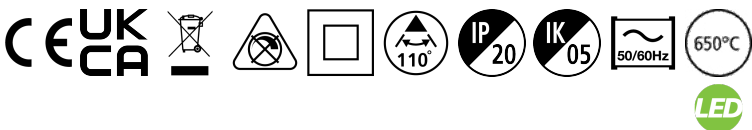

Features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 260mm


Product Overview

|                                 |                                                     |
|---------------------------------|-----------------------------------------------------|
| Product name                    | START Downlight 5in1 65-260 1800LM                  |
| Technology                      | LED                                                 |
| Cap/Base                        | N/A                                                 |
| Housing                         | PC Polycarbonate                                    |
| Mount                           | Ceiling recessed mounting, Ceiling surface mounting |
| General application             | Residential & Consumer                              |
| ETIM Class                      | EC001744                                            |
| E-number FI                     | 4278429                                             |
| Fixture luminous flux (lm)      | 1800                                                |
| Luminaire efficacy (lm/W)       | 100                                                 |
| Colour temperature (K)          | 4000                                                |
| Light colour                    | N/A                                                 |
| CRI (Ra)                        | 80                                                  |
| Colour Variation Initial (SDCM) | 6                                                   |
| Beam Angle (°)                  | 110                                                 |
| Photobiological Risk Group      | RG0                                                 |
| Total power consumption (W)     | 18                                                  |
| Electrical protection           | Class II                                            |
| Control gear type               | LED driver constant current                         |
| Dimmable                        | No                                                  |

## START Downlight 5in1 65-260 1800LM 0053150

|                     |                         |
|---------------------|-------------------------|
| LED Flickering Rate | Low (6% - 20%)          |
| Housing colour      | RAL 9003 - Signal white |
| IP rating           | IP20                    |
| IK rating           | IK05                    |
| Product EAN number  | 5410288531502           |
| Warranty            | 3 years                 |
| Dimming method      | N/A                     |

### Photometry

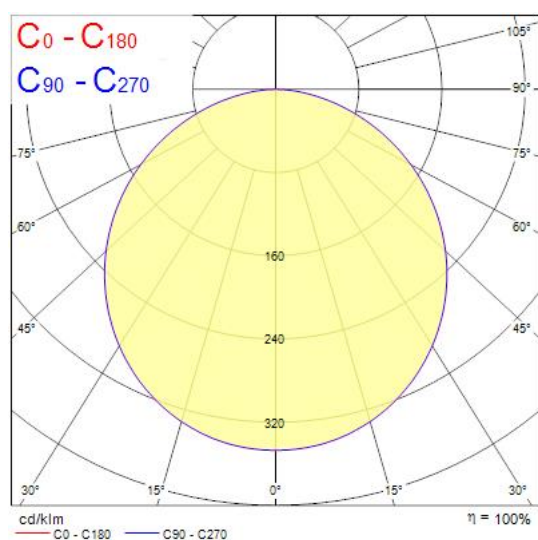

### Technical drawings

