

START Surface Wall Cube IP54 2x140lm 2CCT Black
0047136



Features

- Exterior adjustable surface wall up and down light luminaire, black aluminium - RAL9005, 280lm, 5.8W, 48lm/W, 3000/4000K switchable CCT, adjustable beam angle (0 - 94°), 104.000 hrs L70:B50 lifespan, CRI 80, SDCM<3, IP54, IK05, 1000 hrs salt spray test, -20 - +45°C operating temperature range, 108x108x108mm, Class I


Product Overview

Product name	START Surface Wall Cube IP54 2x140lm 2CCT Black
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579605
Fixture luminous flux (lm)	280
Luminaire efficacy (lm/W)	48
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	5.8
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Black
IP rating	IP54
IK rating	IK05
Product EAN number	5410288471365

START Surface Wall Cube IP54 2x140lm 2CCT Black
0047136

Warranty	5 years
Dimming method	N/A

Photometry

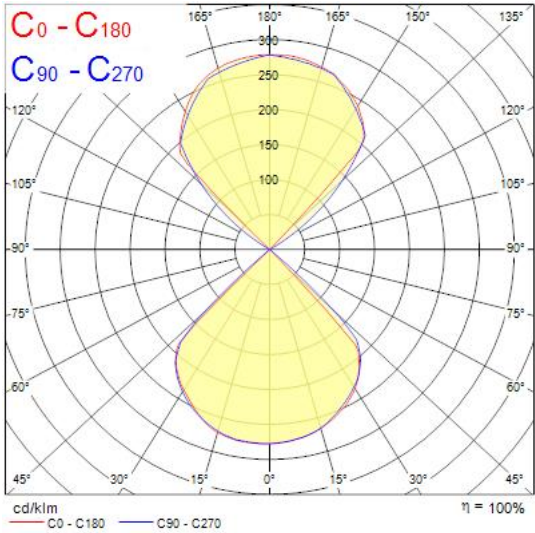

Technical drawings

