

RANA LED S 1200 LO 3K LOUV+PRI W GEN2  
0051476



Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x65mm, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 2900lm, 28W, 104lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


Product Overview

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | RANA LED S 1200 LO 3K LOUV+PRI W GEN2  |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling surface mounting, Suspended    |
| General application             | Office, Hospitality, Retail, Education |
| ETIM Class                      | EC002892                               |
| E-number FI                     | 4273587                                |
| Fixture luminous flux (lm)      | 2900                                   |
| Luminous flux (lm)              | 2900                                   |
| Luminaire efficacy (lm/W)       | 104                                    |
| Colour temperature (K)          | 3000                                   |
| Light colour                    | Warm White                             |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | 3                                      |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 28                                     |
| Electrical protection           | Class I                                |

RANA LED S 1200 LO 3K LOUV+PRI W GEN2  
0051476

|                     |                             |
|---------------------|-----------------------------|
| Control gear type   | LED driver constant current |
| Dimmable            | No                          |
| LED Flickering Rate | Ultra low (5% or less)      |
| Housing colour      | White                       |
| IP rating           | IP20                        |
| IK rating           | IK07                        |
| Product EAN number  | 5410288514765               |
| Warranty            | 5 years                     |
| Dimming method      | N/A                         |

Photometry

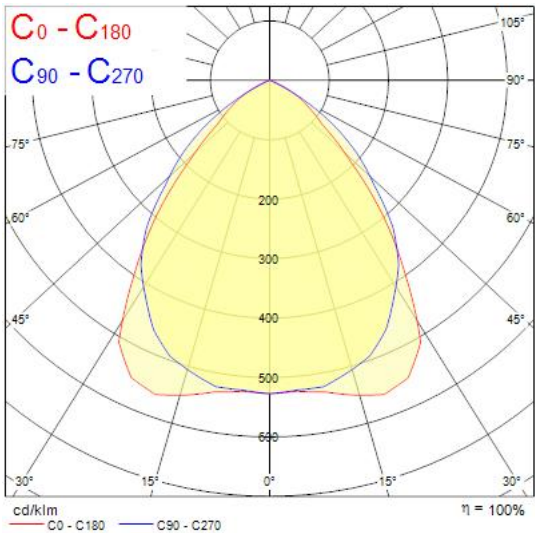

Technical drawings

