

START Surface IP66 900-2950LM 840 IK10 BLK
0049295



Features

- LED exterior surface mounted luminaire, 350mm diameter, 2950lm as max. lumen output, can be adjusted down to 900lm by internal switch, max 24W power consumption, max 133lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START Surface IP66 900-2950LM 840 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579596
Fixture luminous flux (lm)	2950
Luminaire efficacy (lm/W)	123
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9011 - Graphite black
IP rating	IP66

START Surface IP66 900-2950LM 840 IK10 BLK
0049295

IK rating	IK10
Product EAN number	5410288492957
Warranty	5 years
Dimming method	N/A

Photometry

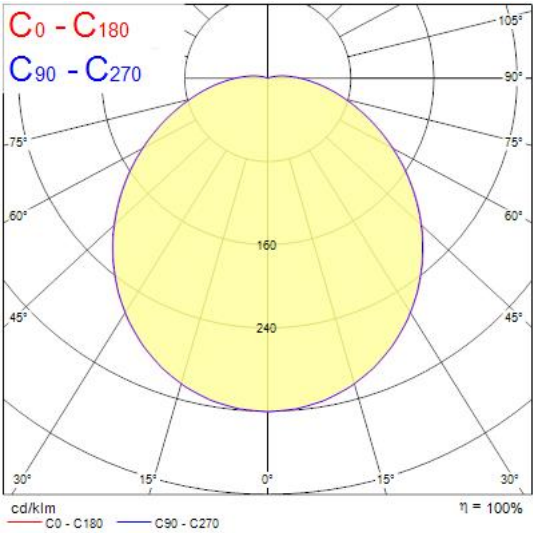

Technical drawings

