

Start Downlight Flat 205 IP44 1750LM 840 DIM
0054123



Features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP44 rated from the front.


Product Overview

Product name	Start Downlight Flat 205 IP44 1750LM 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Max load (A)	112
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
E-number FI	4278499
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes

Start Downlight Flat 205 IP44 1750LM 840 DIM 0054123

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288541235
Warranty	5 years
Dimming method	Mains: leading / trailing edge

Photometry

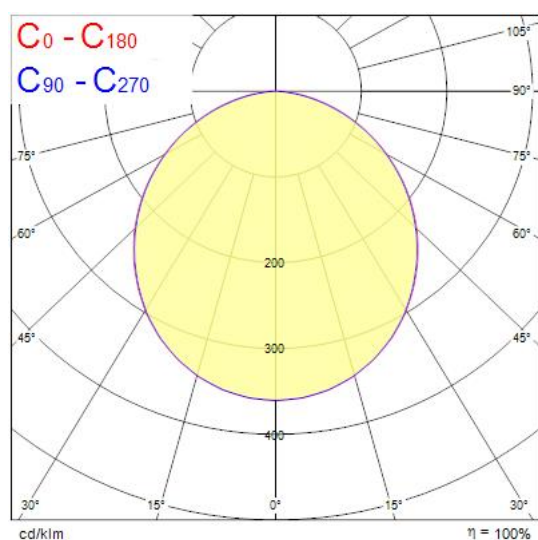

Technical drawings

