

START Surface Wall Round IP54 500lm Direct 2CCT 0047134



Features

- Round shaped exterior surface wall light with integrated LED, RAL9005 - Black Aluminium housing, light emission on one side, 500/480 lm, 6.7 W, 75/72 lm/W, 3000 or 4000K adjustable CCT, non dimmable, CRI>80, 220-240V, Class I, lifespan L70:B50: 90000 hrs IP54, IK07, 76 x 129 x 110mm (W x H x D). Weight: 0.55 kg.


Product Overview

| | |
|--|---|
| Product name | START Surface Wall Round IP54 500lm Direct 2CCT |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Wall recessed, Wall surface mounted |
| General application | Residential & Consumer |
| ETIM Class | EC002892 |
| E-number FI | 4579601 |
| Fixture luminous flux (lm) | 500 |
| Luminaire efficacy (lm/W) | 75 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 3 |
| Beam Angle (°) | 40 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 6.7 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Housing colour | RAL9005 |

START Surface Wall Round IP54 500lm Direct 2CCT 0047134

| | |
|--------------------|---------------|
| IP rating | IP54 |
| IK rating | IK07 |
| Product EAN number | 5410288471341 |
| Warranty | 5 years |
| Dimming method | N/A |

Photometry

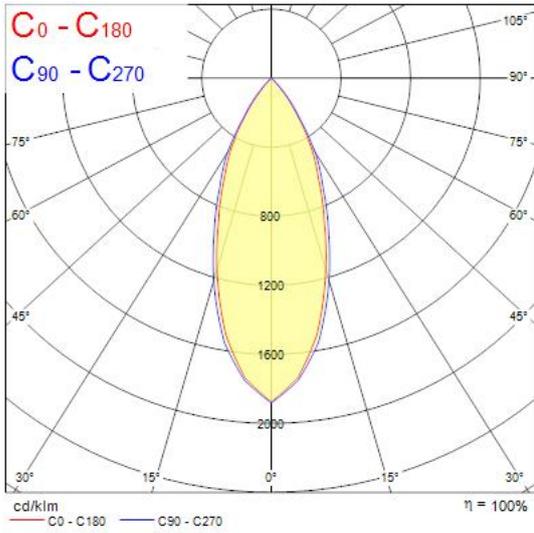

Technical drawings

