

Start Downlight Flat 108 IP44 600LM 840 DIM  
0054119



Features

- START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate phase dimmable driver and Loop in out box; 7W; 600Lm; 86Lm/W; 4000K; IP44 rated from the front


Product Overview

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Product name                    | Start Downlight Flat 108 IP44 600LM 840 DIM |
| Technology                      | LED                                         |
| Cap/Base                        | N/A                                         |
| Housing                         | Aluminium                                   |
| Mount                           | Ceiling recessed mounting                   |
| General application             | Hospitality                                 |
| ETIM Class                      | EC001744                                    |
| E-number FI                     | 4278491                                     |
| Fixture luminous flux (lm)      | 600                                         |
| Luminaire efficacy (lm/W)       | 85                                          |
| Colour temperature (K)          | 4000                                        |
| Light colour                    | Cool White                                  |
| CRI (Ra)                        | 80                                          |
| Colour Variation Initial (SDCM) | 3                                           |
| Beam Angle (°)                  | 120                                         |
| Glare control                   | < 28                                        |
| Photobiological Risk Group      | RG0                                         |
| Total power consumption (W)     | 7                                           |
| Electrical protection           | Class II                                    |
| Control gear type               | LED driver constant current                 |
| Dimmable                        | Yes                                         |
| LED Flickering Rate             | Ultra low (5% or less)                      |

## Start Downlight Flat 108 IP44 600LM 840 DIM 0054119

|                    |                                |
|--------------------|--------------------------------|
| Housing colour     | RAL 9003 - Signal white        |
| IP rating          | IP44/20                        |
| IK rating          | IK06                           |
| Product EAN number | 5410288541198                  |
| Warranty           | 5 years                        |
| Dimming method     | Mains: leading / trailing edge |

### Photometry

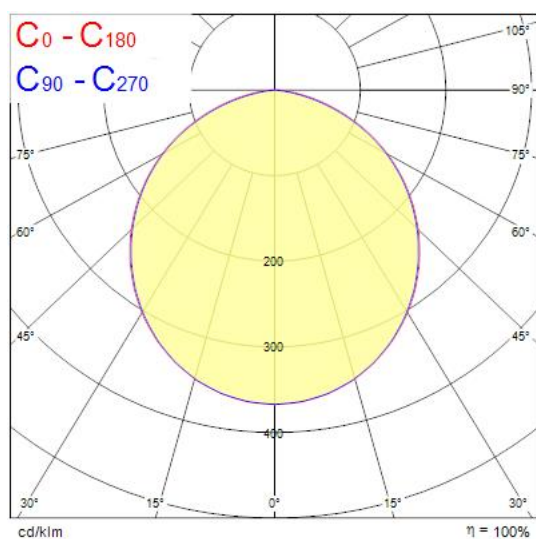

### Technical drawings

