


START Surface Wall Cube IP54 2x140lm 2CCT White
0047137



Features

- Exterior adjustable surface wall up and down light luminaire, RAL9016 - Traffic White colour, 280lm, 5.8W, 48lm/W, 3000/4000K switchable CCT, adjustable beam angle (0 - 94°), 104.000 hrs L70:B50 lifespan, CRI 80, SDCM<3, IP54, IK05, 1000 hrs salt spray test, -20 - +45°C operating temperature range, 108x108x108mm, Class I


Product Overview

Product name	START Surface Wall Cube IP54 2x140lm 2CCT White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579606
Fixture luminous flux (lm)	280
Luminaire efficacy (lm/W)	48
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	5.8
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP54
IK rating	IK05
Product EAN number	5410288471372

START Surface Wall Cube IP54 2x140lm 2CCT White
0047137

Warranty	5 years
Dimming method	N/A

Photometry

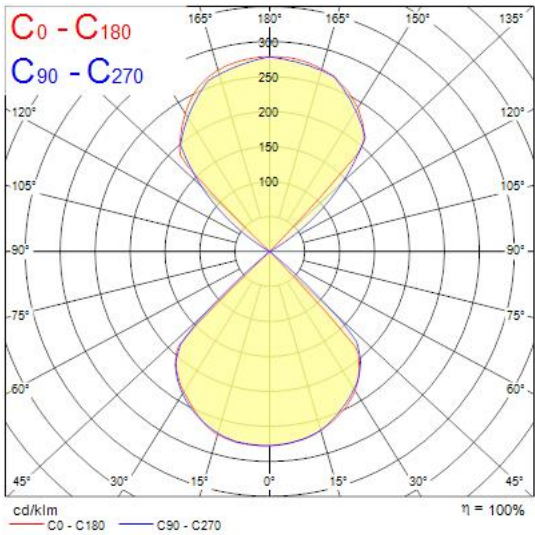

Technical drawings

