



Features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 5700lm, 41W, 139lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, MW sensor for 360° detection up to 8m range at 6m mounting height, IK08, IP20, 1220 x 70 x 76.5mm (LxWxD) dimensions, 1.47kg weight.


Product Overview

Product name	Wayline 1200 MW 5700lm 840
Technology	LED
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4278323
Fixture luminous flux (lm)	5700
Luminaire efficacy (lm/W)	139
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	115
Photobiological Risk Group	RG1
Total power consumption (W)	41
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK08

Wayline 1200 MW 5700lm 840
0048933

Product EAN number	5410288489339
Warranty	5 years
Dimming method	N/A

Photometry

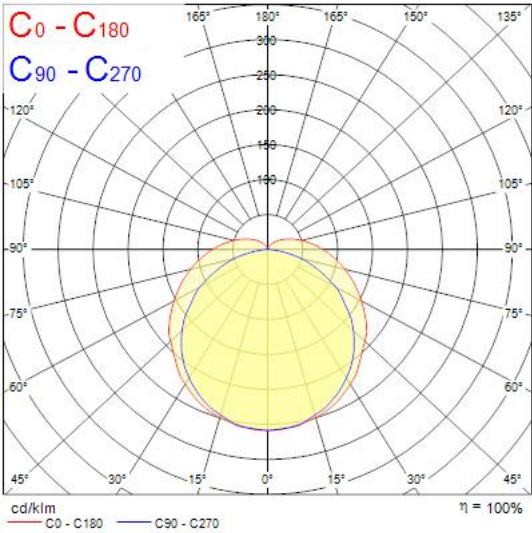

Technical drawings

