

RANA LINEAR S 32 4K MPO SSC01 W
0051339



Features

- Surface or Suspended LED Linear luminaire with MicroPrismatic Optic, Dimensions: 1150mm x 87mm x 87mm, Direct, White Body, SylSmart Standalone capable, Electric Class 1, Neutral White LED (4000K), 3100lm, 32W, 97lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<21, L90B10 at 50,000 hours, Glow Wire Test 850°C


Product Overview

Product name	RANA LINEAR S 32 4K MPO SSC01 W
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Fixture rating	Enclosed
Environment	Internal
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3100
Luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	32
Electrical protection	Class I

RANA LINEAR S 32 4K MPO SSC01 W 0051339

Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288513393
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

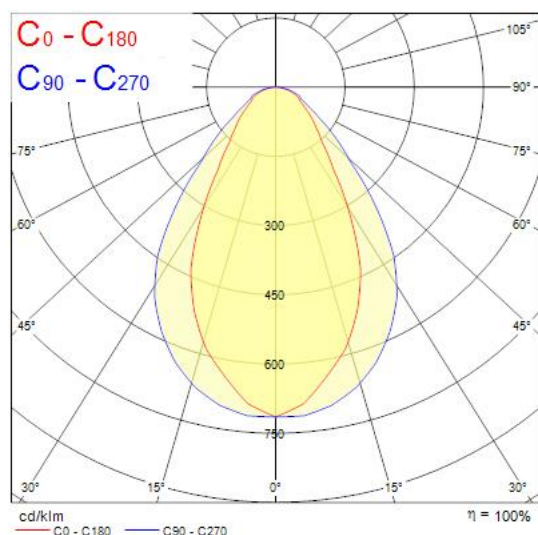

Technical drawings

