

START eco Downlight Flat 205 IP44 1750lm 840 DIM
0053942



Features

- START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate, phase dimmable driver and loop in- out box, 17W; 1750Lm; 103Lm/W; 4000K; IP44 rated from the front.


Product Overview

Product name	START eco Downlight Flat 205 IP44 1750lm 840 DIM
Technology	LED
Housing	Aluminium
Max load (A)	112
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white

START eco Downlight Flat 205 IP44 1750lm 840 DIM 0053942

IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288539423
Warranty	3 years
Dimming method	Mains: leading / trailing edge

Photometry

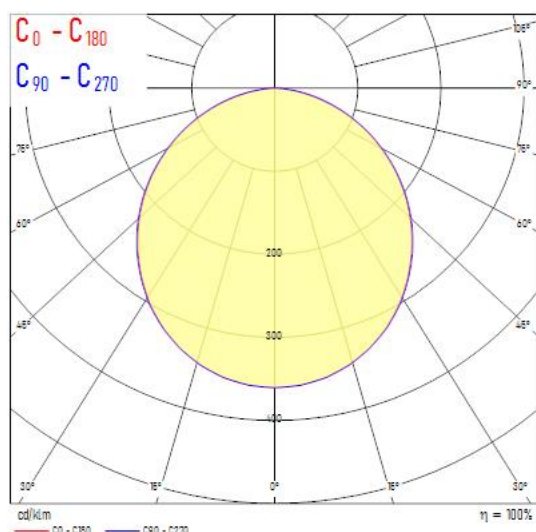

Technical drawings

