

START eco Downlight 215 2100lm 830 Surface  
0054105



Features

- START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 24W; 2100Lm; 88Lm/W; 3000K.


Product Overview

|                                 |                                            |
|---------------------------------|--------------------------------------------|
| Product name                    | START eco Downlight 215 2100lm 830 Surface |
| Technology                      | LED                                        |
| Housing                         | PC Polycarbonate                           |
| Mount                           | Ceiling surface mounting                   |
| General application             | Retail                                     |
| ETIM Class                      | EC002892                                   |
| Fixture luminous flux (lm)      | 2100                                       |
| Luminaire efficacy (lm/W)       | 88                                         |
| Colour temperature (K)          | 3000                                       |
| Light colour                    | Warm White                                 |
| CRI (Ra)                        | 80                                         |
| Colour Variation Initial (SDCM) | 6                                          |
| Beam Angle (°)                  | 110                                        |
| Glare control                   | < 28                                       |
| Photobiological Risk Group      | RG0                                        |
| Total power consumption (W)     | 24                                         |
| Electrical protection           | Class II                                   |
| Dimmable                        | No                                         |
| LED Flickering Rate             | Medium (21% - 40%)                         |
| Housing colour                  | RAL 9003 - Signal white                    |

## START eco Downlight 215 2100lm 830 Surface 0054105

|                    |               |
|--------------------|---------------|
| IP rating          | IP20          |
| IK rating          | IK02          |
| Product EAN number | 5410288541051 |
| Warranty           | 3 years       |
| Dimming method     | N/A           |

### Photometry

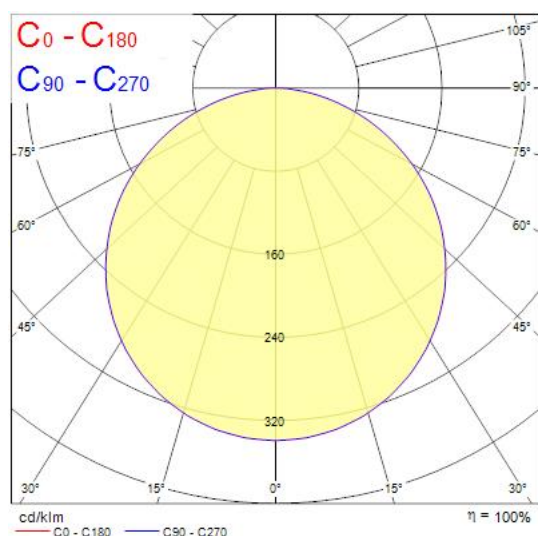

### Technical drawings

