

START eco Downlight Flat 205 IP44 2250lm 840 DIM
0053944



Features

- START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate phase dimmable driver and loop in out box; 24W; 2250Lm; 94Lm/W; 4000K; IP44 rated from the front.

Product Overview

Product name	START eco Downlight Flat 205 IP44 2250lm 840 DIM
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	2250
Luminaire efficacy (lm/W)	94
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20

START eco Downlight Flat 205 IP44 2250lm 840 DIM 0053944

IK rating

IK06

Product EAN number

5410288539447


Warranty

3 years

Dimming method

Mains: leading / trailing edge

Photometry

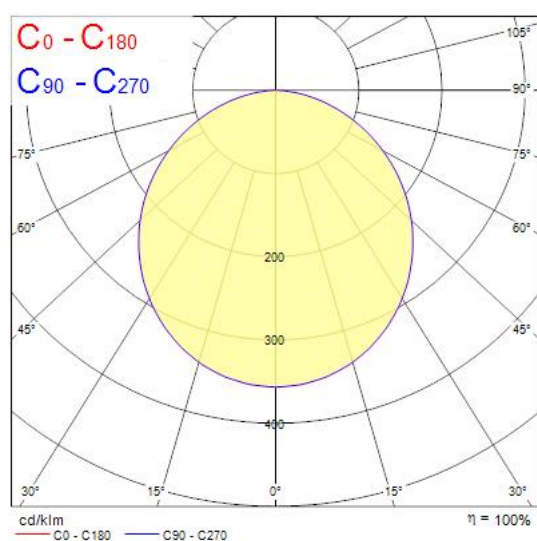

Technical drawings

