


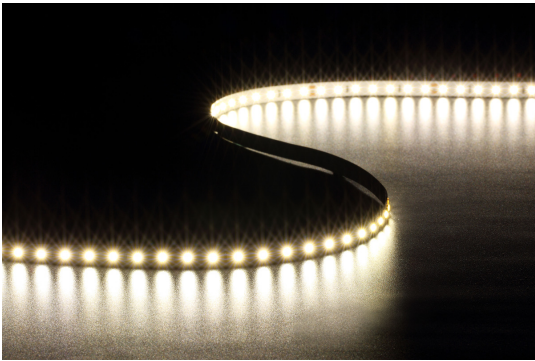

Features


- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 420 LEDs; 11750lm per 5m (2350lm per 1m); 24V; 4000K; CRI80; SDCM ≤3. Needs to be used with aluminium profile for cooling LED chips purpose and therefore assuring longer lifetime (Profile HO Surface 16 0022604 can be used);Compatible with emergency packs: 0046600, 0046601

Product Overview

Product name	START Flex IP20 840 11750lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276901
Fixture luminous flux (lm)	11750
Luminaire efficacy (lm/W)	142
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	82.5
Electrical protection	Class III
Dimmable	Yes
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681153
Warranty	5 years
Dimming method	Other

START Flex IP20 840 11750lm
0068115

Photometry

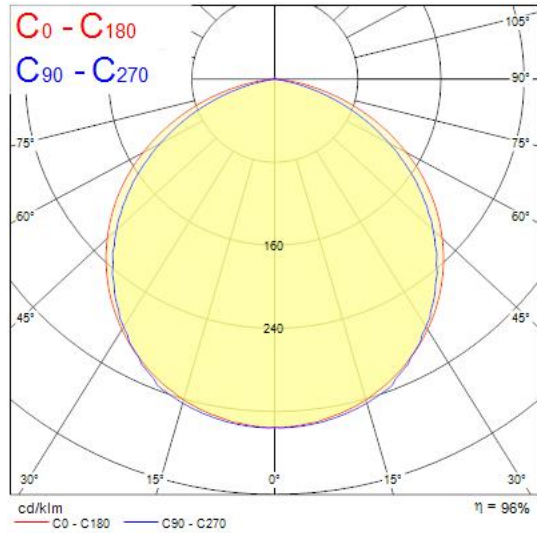

Technical drawings

