



### Features

• 2059329 BEACON XL MUSE 4K SSC01 L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 4000K neutral white, total system power: 41W, total fixture output: 2884lm, luminaire efficacy: 70lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, SylSmart SSC, power factor: 0.95, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment...


### Product Overview

|                            |                                |
|----------------------------|--------------------------------|
| Product name               | BEACON XL MUSE 4K SSC01 L3 WHT |
| Technology                 | LED                            |
| Housing                    | Aluminium                      |
| Mount                      | Track mounting                 |
| Environment                | Internal                       |
| General application        | Museums & Galleries, Retail    |
| ETIM Class                 | EC001744                       |
| Fixture luminous flux (lm) | 2884                           |
| Luminaire efficacy (lm/W)  | 70                             |
| LOR (%)                    | 100                            |
| Colour temperature (K)     | 4000                           |
| Light colour               | Neutral White                  |
| CRI (Ra)                   | 97                             |
| Colour Consistency (SDCM)  | 3                              |

## BEACON XL MUSE 4K SSC01 L3 WHT 2059329

|                             |                    |
|-----------------------------|--------------------|
| Beam Angle (°)              | 10                 |
| Photobiological Risk Group  | RG0                |
| Total power consumption (W) | 41                 |
| Electrical protection       | Class I            |
| Control gear type           | Electronic ballast |
| Dimmable                    | Yes                |
| Minimum dimming level (%)   | 5                  |
| Housing colour              | White              |
| IP rating                   | IP20               |
| Product EAN number          | 5025768593293      |
| Warranty                    | 5 years            |
| Dimming method              | SylSmart SSC       |

### Photometry

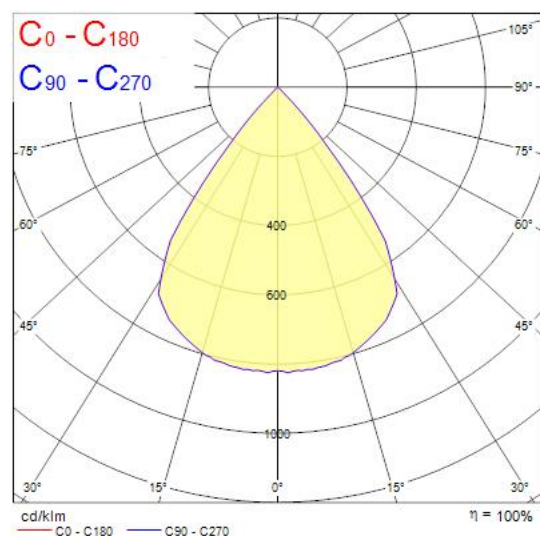

### Technical drawings

