


GIOTTO 335 4000K SURFACE EMERGENCY  
3034816

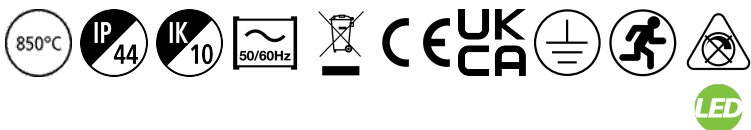

Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2350lm, 19.5W, 121lm/W, 4000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 100,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.


Product Overview

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Product name                    | GIOTTO 335 4000K SURFACE EMERGENCY             |
| Technology                      | LED                                            |
| Cap/Base                        | N/A                                            |
| Housing                         | PC Polycarbonate                               |
| Mount                           | Ceiling surface mounting, Wall surface mounted |
| Environment                     | Indoor                                         |
| General application             | Hospitality, Logistics & Industry              |
| ETIM Class                      | EC002892                                       |
| Fixture luminous flux (lm)      | 2350                                           |
| Luminous flux (lm)              | 2350                                           |
| Luminaire efficacy (lm/W)       | 121                                            |
| Colour temperature (K)          | 4000                                           |
| Light colour                    | Neutral White                                  |
| CRI (Ra)                        | 80                                             |
| Colour Variation Initial (SDCM) | 3                                              |
| Beam Angle (°)                  | 80                                             |
| Glare control                   | < 26                                           |
| Photobiological Risk Group      | RG0                                            |
| Luminous flux (emergency) (lm)  | 155                                            |
| Luminous flux (emergency) (lm)  | 155                                            |

## GIOTTO 335 4000K SURFACE EMERGENCY 3034816

|                             |                             |
|-----------------------------|-----------------------------|
| Total power consumption (W) | 24                          |
| Electrical protection       | Class I                     |
| Control gear type           | LED driver constant current |
| Control gear mounting       | Integrated                  |
| Dimmable                    | No                          |
| LED Flickering Rate         | Ultra low (5% or less)      |
| Housing colour              | White                       |
| IP rating                   | IP44                        |
| IK rating                   | IK10                        |
| Product EAN number          | 8711971348160               |
| Warranty                    | 5 years                     |
| Colour Code                 | 840                         |
| Dimming method              | N/A                         |

### Photometry

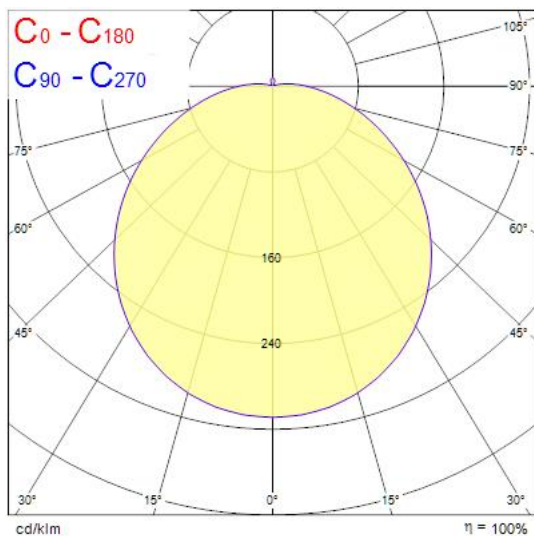

### Technical drawings

