



Features

- Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, silver coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.


Product Overview

Product name	Inverto Pend Rmt NW Eb Silver
Technology	LED
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
ETIM Class	EC001743
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast

Inverto Pend Rmt NW Eb Silver
3080063

Dimmable	No
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP20
IK rating	IK07
Product EAN number	8711971800637
Warranty	5 years
Dimming method	N/A

Photometry

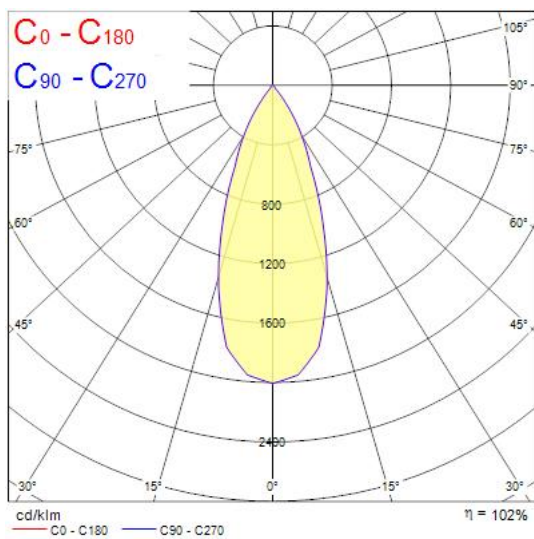

Technical drawings

