



### Features

• 2093051 BEACON XXL MB DALI 4K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Silicone lens for controlled beam, colour temperature: 4000K neutral white, total system power: 48W, total fixture output: 4179lm, luminaire efficacy: 87lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, DALI dimmable, power factor: 0.95 electrical protection: CLASS I, DALI track adaptor, suitable for Concord Lytespan DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

### Product Overview


|                            |                              |
|----------------------------|------------------------------|
| Product name               | BEACON XXL MB DALI 4K L3 WHT |
| Technology                 | LED                          |
| Housing                    | Aluminium                    |
| Mount                      | Track mounting               |
| Environment                | Internal                     |
| General application        | Retail                       |
| ETIM Class                 | EC001744                     |
| E-number FI                | 4278827                      |
| E-number SE                | 7401076                      |
| Fixture luminous flux (lm) | 4179                         |
| Luminaire efficacy (lm/W)  | 87.06                        |
| LOR (%)                    | 100                          |
| Colour temperature (K)     | 4000                         |
| Light colour               | Neutral White                |

# Concord

## BEACON XXL MB DALI 4K L3 WHT 2093051

|                             |                    |
|-----------------------------|--------------------|
| CRI (Ra)                    | 93                 |
| Colour Consistency (SDCM)   | 3                  |
| Beam Angle (°)              | 50                 |
| Photobiological Risk Group  | RG1                |
| Total power consumption (W) | 48                 |
| Product Voltage (V)         | 240                |
| Electrical protection       | Class I            |
| Control gear type           | Electronic ballast |
| Dimmable                    | Yes                |
| Housing colour              | White              |
| IP rating                   | IP20               |
| Product EAN number          | 5025768930517      |
| Warranty                    | 5 years            |
| Dimming method              | DALI               |

### Photometry

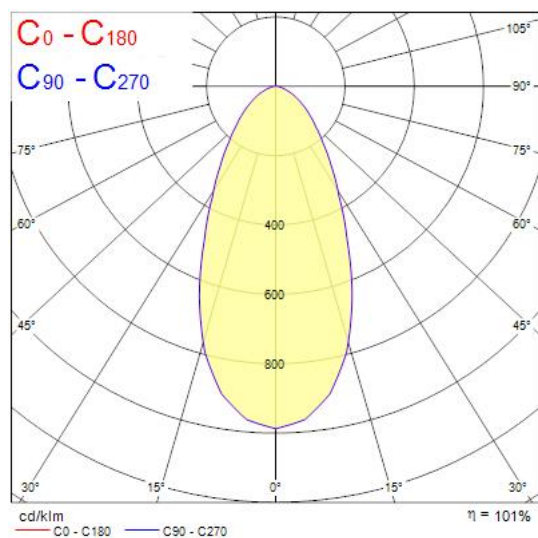

### Technical drawings

